

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner established by T. W. Davenport under GLO contract no. 102 dated July 20, 1863.

Surveyor General records state:

Set post corner to Secs 7, 18, 12 & 13 on top of table from which post:

- A spruce 8 in diam bears N 75° W, 14 lks dist
- A spruce 12 in diam bears S 60° W, 5 lks dist
- A spruce 10 in diam bears N 20° E, 7 lks dist
- A spruce 6 in diam bears S 30° E, 6 lks dist



Description of corner evidence found:

NONE


Note: Forest Service records dated September and November, 1973, by E. Thomas not substantiated by this search effort.

14 inch spruce with blaze examined and no scribe marks identified. Also, the blaze does not face proper direction and spruce stumps or stump mounds not found to fit calls for corner as stated in report.

Description of monument and accessories established to perpetuate the original location of this corner:

At position determined by proportionate measurement between the found corner common to Sections 13 and 18 to the South and the Section corner common to Sections 1, 6, 7 & 12 to the North set a 2½ inch aluminum cap on a 2 inch aluminum pipe 30 inches long and projecting 5 inches out of the ground with a surrounding earthen mound and a 6 foot steel fence post alongside with a sign 54-4 attached.

Aluminum cap marked thus:



New bearing trees established:

- A tamarack 11 ins diam bears N 61° E, 6.9 feet dist marked T 2 S R 38 E S 7 BT
- A fir 10 ins diam bears S 19° E, 7.3 feet dist marked T 2 S R 38 E S 18 BT
- A fir 15 ins diam bears S 69° W, 37.2 feet dist marked T 2 S R 37 E S 13 BT
- A tamarack 11 ins diam bears N 25° W, 32.3 feet dist marked T 2 S R 37 E S 12 BT

Each new bearing tree has a sign 54-3 attached below a 6 inch band of red paint and has a brass washer marked PLS 1639 nailed flush with BT blaze. A sign 54-4 is attached on opposite side of BT blaze.

I hereby certify that the above described corner monument was properly established by me on Oct. 5, 1983, and witnessed by Jim DeMastus.

Office of... County Surveyor..... County of... Union  
 State of... Oregon..... I hereby certify that the within instrument was filed in this office  
 for record on the..... day of..... 19.....  
 by.....  
 (COUNTY OFFICIAL)

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*William L. Hanley*

OREGON  
JULY 14, 1978  
WILLIAM L. HANLEY  
1639

**UNION COUNTY SURVEYOR**

Date Received 10-13-83

Date Filed 10-28-83

By G. LANGRISH, DEPUTY

File No. 379-83 R

**HORIZONTAL CONTROL DATA**  
**UNION COUNTY, OREGON**  
**OREGON STATE PLANE, NORTH ZONE (3601)**

STA NAME: 200151

CORNER COMMON TO: 7,12,13,18

TWP. 2 S. RGE. 37&38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: JUNE 2001

LAT: 45 ° 23 ' 53.29394 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 6 ' 59.76697 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 640277.270 INT FT.

E: 8814213.040 INT FT.

TYPE: GPS

THETA: 1 ° 41 ' 24.9812868 "



ORDER: SECOND CLASS: 1

SCALE FACTOR: 0.9999025819

ELEV: 4946.82 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

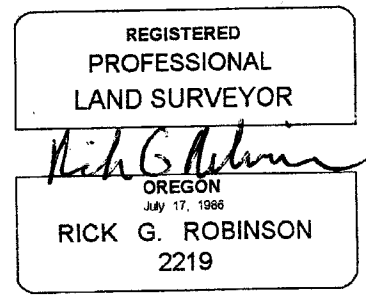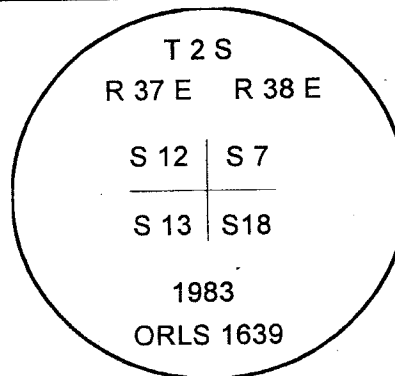

1 METER = 3.2808333333... US FEET = 39.37 INCHES  
1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM  
TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT )  
DIVIDE 20,906,000 BY ( 20,906,000 + ELLIPSOID ELEV. IN FEET )