

UNION COUNTY SURVEYOR


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David P. Thompson under GLO contract Number 103, dated September 3rd, 1863. Surveyor General record states:

T 2 S R 38 E J - 21

Set post for corner to secs 10,11,13,14 in mound of earth with pits trench charred stake as per instructions:



DESCRIPTION OF CORNER EVIDENCE FOUND:

No evidence remaining
SEE MAJOR PARTITION for Koza, dated 5-99.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At intersections of McDonald Road and Webster Lane determined by survey number 14-78, I set a 2½"x30" aluminum pipe with aluminum cap, marked as shown below, 34" in the ground.

A 5/8"x30" iron rebar with aluminum cap bears N 40°E, a distance of 66.20 feet, marked NE RP.



A Power Pole bears S 46°E, a distance of 53.69 feet, marked with a PK nail in West side power pole 2 feet above ground

A 5/8"x30" iron rebar with aluminum cap bears S 50°W, a distance of 39.44 feet, marked SW RP.

A 2 x 2 iron post bears N 50°W, a distance of 51.51 feet.

I hereby certify that the corner was monumented on March 16, 1999.

Witness: Gregory T. Blackman, Jr. and Greg Engelgau

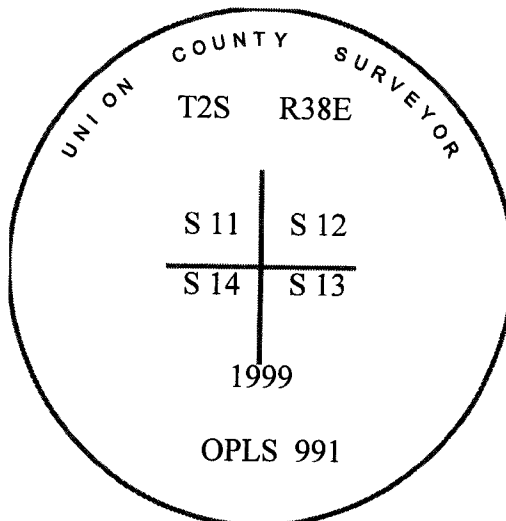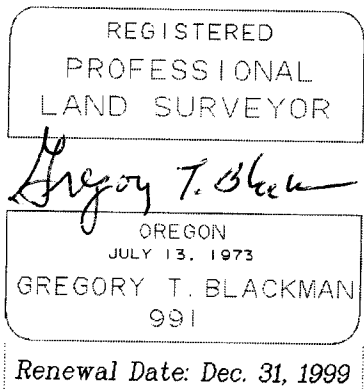

UNION COUNTY SURVEYOR

Date Received 5/10/99

Date Filed 7/17/99

Filed By R. ROBINSON, Deputy

File Number 016-1999R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination. The distances are the center of each bearing object, unless otherwise noted above

GEODETTIC CONTROL DATA

**OREGON STATE PLANE, NORTH ZONE (3601)
UNION COUNTY, OREGON**

STA. NAME: 9910

SECTION CORNER:
SEC. 11 | 12
SEC. 14 | 13 TWP.2 S. RGE.38 E
UNION COUNTY, OREGON
DATE TIED: JULY, 1999

GEODETTIC COOR: NAD 83(91)
LAT: 45:23'55.13374" N
LONG: 118:00'51.63721" W

SURVEYOR: WALTER L. CASWELL
PLS 737

SP. COOR: NAD 83(91)
N: 641254.886 INT.FT

FIRM: EAGLE GPS SURVEY CORP
6110 SW LOMBARD AVE.
BEAVERTON, OR. 97008-4736
(503) 643-1073

E: 8840461.547 INT.FT.
THETA: 1:45'46.053"

TYPE: GPS

SCALE FACTOR: 0.999902618

ORDER: SECOND CLASS: 1

ELEV: 2755.10 U.S.FT.

ELEV. DATUM: NGVD 1929(1947)

DIRECTIONS "TO REACH":



Albert Hertel 10-14-99



EXPIRES: 06/30/01

1 METER = 3.280833... U.S. FEET = 39.37 INCHES EXACTLY
1 METER = 3.280839895 INTL. FEET OR 1 INCH = 2.54CM. EXACTLY
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

JOB 99-005
SHEET 32 OF 63