


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner originally established by David T. Thompson under G.L.O. contract number 103 dated Sept. 3, 1863. Surveyor General record states:

Set post for corner to sections 17,18,19 and 20 from which:

- A pine 20" dia. bears N 55 W, 40 lks. dist.
- A pine 16" dia. bears N 10 E, 86 lks. dist.
- A pine 18" dia. bears S 70 E, 53 lks. dist.
- A pine 18 "dia. bears S 15 W, 221 lks. dist.




Description of corner evidence found:  
Nothing found.

Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate position set a 1" x 36" iron pipe with attached 2½" brass cap marked as shown.

From which:

- A 12" dia. ponderosa pine bears N 13 E, 59.1 feet marked T2S R38E S17 BT.
- A 14" dia fir bears S 49 E, 44.2 feet marked T2S R38E S20 BT.
- A 16" dia. ponderosa pine bears S 21 W, 35.7 feet marked T2S R38E S19 BT.
- A 17" ponderosa pine bears N 15 W, 35.7 feet marked T2S R38E S 18 BT.

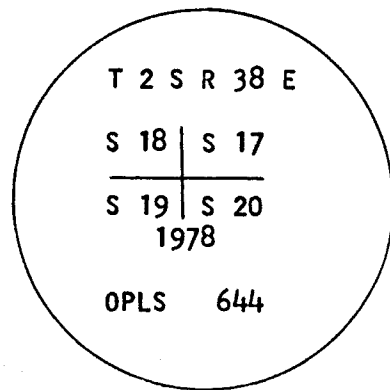

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Duane J. Griffith*  
OREGON  
JULY 10, 1964  
DUANE J. GRIFFITH

**UNION COUNTY  
SURVEYOR**

---

Date Received 6-17-85

Date Filed 6-18-85

By G. LANGLITZ, DEPUTY

File No. 42-85 R

See map of survey 37-78

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200517

SECTION CORNER COMMON TO SECTIONS: 17, 18, 19, and 20

TWP. 2 S. RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: August 3, 2005

LAT: 45 ° 23 ' 1.921887 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 5 ' 48.14254 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 635228.165 INT FT.

E: 8819475.967 INT FT.

TYPE: GPS

THETA: 1 ° 42 ' 15.7763337 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999016171

ELEV: 3476.21 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

Corner is 1" iron pipe with 2 1/2" brass cap  
marked as shown:



REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2006

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)