


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by David T. Thompson under G.L.O. contract number 103, dated Sept. 3, 1863. Surveyor General record states:

Set post in mound of stone.

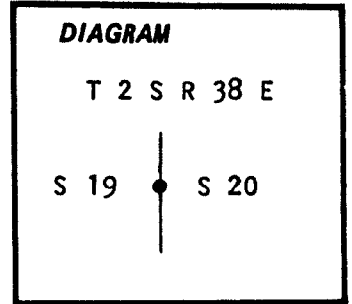


Description of corner evidence found:

Nothing found

Description of monument and accessories I established to perpetuate the

original location of this corner: At proportionate position set a 1" x 36" iron pipe with attached 2 1/2" brass cap marked as shown.

No accessories available.

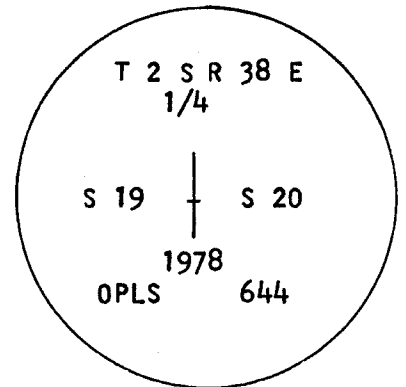

UNION COUNTY
SURVEYOR

Date Received 6-17-85
Date Filed 6-18-85
By G. LANGLITZ, DEPUTY
File No. 41-85 R

See map of survey 37-78

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200516

1/4 SECTION CORNER COMMON TO SECTIONS: 19 and 20

TWP. 2 S. RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: August 3, 2005

LAT: 45 ° 22 ' 35.747149 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 118 ° 5 ' 48.01012 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 632578.743 INT FT.

E: 8819564.258 INT FT.

TYPE: GPS

THETA: 1 ° 42 ' 15.8702429 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999011493

ELEV: 3235.88 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is 1" Iron pipe with 2 1/2" brass cap
marked as shown:

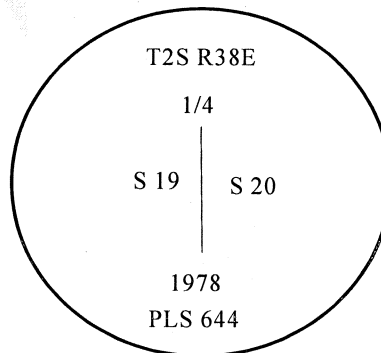

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2006

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)