

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by David T. Thompson under GLO contract Number 103, dated September 3, 1863. Surveyor General record states: Set post, in mound of stone.

Survey 48-73 calls position for corner.


Surveys 58-77, 36-78, and 62-78 call "found monument of record".

Survey 34-81 calls found 3/4" pipe with 3" cap.

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found 3/4" pipe with 3" cap as per survey 34-81.


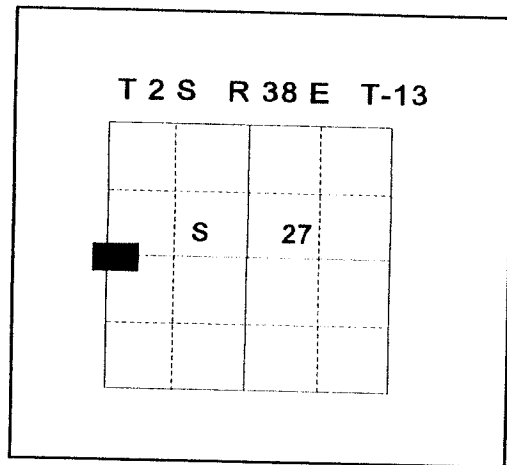


Description of monument and accessories I established to perpetuate the original location of this corner:

Replaced found pipe with a 2½" x 30" aluminum pipe with 2½" aluminum cap marked as shown below, 27" in the ground, from which:

- A 5/8"x30" rebar with 1½" aluminum cap bears N35°E, 57.68 feet, marked UNION COUNTY SURVEYOR NE RP.
- A 5/8"x30" rebar with 1½" aluminum cap bears S21°E, 7.57 feet, marked UNION COUNTY SURVEYOR SE RP.
- A 5/8"x30" rebar with 1½" aluminum cap bears S80°W, 8.41 feet, marked UNION COUNTY SURVEYOR SW RP.
- A 5/8"x30" rebar with 1½" aluminum cap bears N37°W, 64.15 feet, marked UNION COUNTY SURVEYOR NW RP.

I hereby certify that the corner was monumented on March 25, 1996.
Witness: Mark Durbin, Jeff Madsen

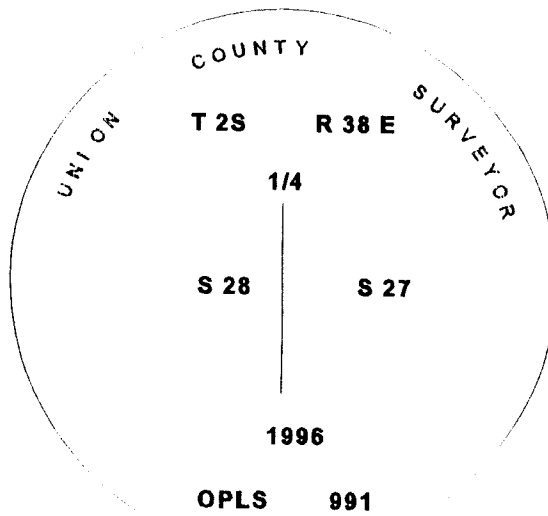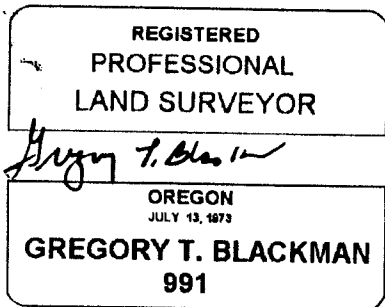

UNION COUNTY SURVEYOR

Date Received 4-22-96

Date Filed 4-22-96

Filed By W. A. Peterson, Deputy

File Number 052-1996 R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East declination.

HORIZONTAL CONTROL DATA

OREGON STATE PLANE, NORTH ZONE (3601)

LaGRANDE & ISLAND CITY, UNION COUNTY OREGON

STA. NAME: 9602

QUARTER CORNER TO: 28 \ 27

TWP.2S, RGE.38E, W.M.

DATE FD.: MARCH, 1996

SURVEYOR: WALTER L. CASWELL
PLS 737

FIRM: EAGLE GPS SURVEY CORP
6110 S.W. LOMBARD AVE.
BEAVERTON, OR. 97008
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 2

GEODETIC COOR: NAD 83(91)

LAT: 45°21'43.61434" N

LONG: 118°03'19.82860" W

SP. COOR: NAD 83(91)

N: 627618.646 INT.FT.

E: 8830296.020 INT.FT.

THETA: 1°44'00.958"

SCALE FACTOR: 0.999900266

ELEV: 2743.256 US.FT.

ELEV. DATUM: NGVD 29

DIRECTIONS "TO REACH"

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Walter L. Caswell

OREGON
JULY 9, 1968
WALTER L. CASWELL
737

EXPIRES 12/31/97

1 meter = 3.280833... U.S. Feet = 39.37 inches exactly
1 meter = 3.280839895 Intl. Feet or 1 inch = 2.54cm. exactly
To Calculate Elevation Factor (in the North American Continent)
Divide 20,906,000 by (20,906,000 + Ellipsoid Elev. in Feet)

JOB 96-007
SHEET 15 OF 66