


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Timothy W. Davenport under GLO contract Number 102, dated July 20, 1863. Surveyor General record states:

Set post for cor to secs 25, 30, 31 & 36 and made mound of rock.

Survey # 6-78 states "finding a 1" pipe set by Union County surveyor James G. Voelz, December 1966 for the City of LaGrande".

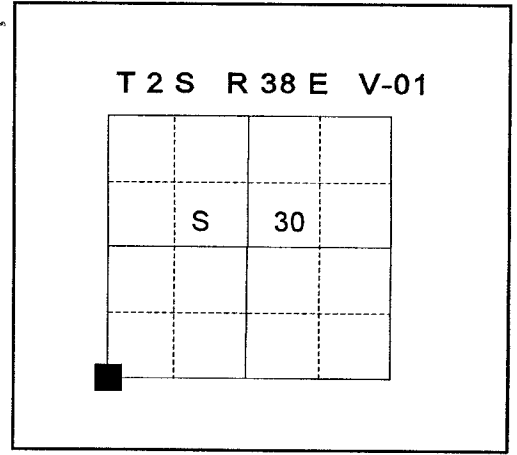

No record of subsequent monumentation found in Union County survey records

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 1" iron pipe as per survey # 6-78.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by survey # 6-78, I set a 2½"x30" aluminum pipe with aluminum cap marked as shown, with a small ring of stone, from which;

NEW BEARING OBJECTS:

A 5/8"X30" iron pin with 1½" aluminum cap marked UNION COUNTY SURVEYOR NE RP bears N24°E, 8.89 feet.

A 5/8"X30" iron pin with 1½" aluminum cap marked UNION COUNTY SURVEYOR SE RP bears S71° E, 9.43 feet.

A 5/8"X30" iron pin with 1½" aluminum cap marked UNION COUNTY SURVEYOR SW RP bears S47°W, 9.16 feet.

A 5/8"X30" iron pin with 1½" aluminum cap marked UNION COUNTY SURVEYOR NW RP bears N29°W, 29.47 feet.

I hereby certify that the corner was monumented on July 10, 1996.


Witness: Mark Durbin, Jeff Madsen

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 13, 1973

GREGORY T. BLACKMAN
991

Renewal Date: December, 31 1995

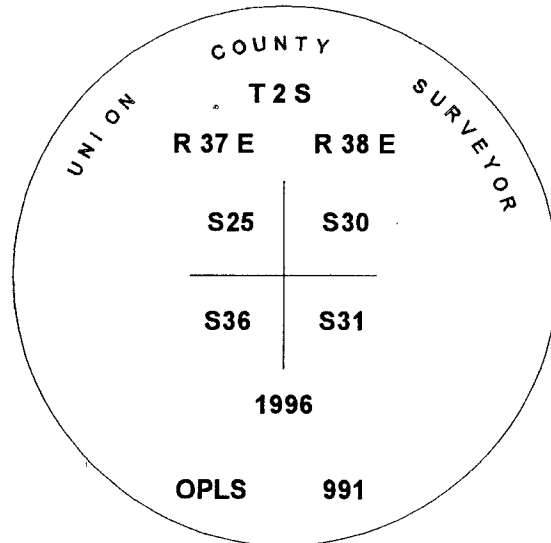

**UNION COUNTY
SURVEYOR**

Date Received 9-16-96

Date Filed 12-13-96

By R. Robinson Denny

File No. 118-1996R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)

STA. NAME: 9319

CORNER COMMON TO 25,36,30 & 31

GEODETIC COOR: NAD 83(91)

TWP.2 S. RGE.37 & 38 E.

LAT: 45°21'17.49678" N

DATE SET: OCT. 1993

LONG: 118°07'00.30039" W

SURVEYOR: WALTER L. CASWELL
PLS 737

SP. COOR: NAD 83(91)

FIRM: EAGLE GPS SURVEY CORP
13545 NW SCIENCE PARK DR
PORTLAND, OR. 97229
(503) 643-1073

N: 624504.495 INT.FT.

E: 8814640.380 INT.FT.

THETA: 1°41'24.602"

TYPE: GPS

SCALE FACTOR: 0.999899847

ORDER: SECOND CLASS: 1

ELEV: 3415.87 US.FT.

ELEV. DATUM: NGVD 29

DIRECTIONS "TO REACH": FROM THE INTERSECTION OF BLACK HAWK TRAIL LANE AND SECOND STREET IN LA GRANDE, GO NORTH ON BLACK HAWK TRAIL LANE. ALMOST IMMEDIATELY YOU WILL TAKE A HARD LEFT AND HEAD WEST FOR A WAYS. AT ABOUT 0.85 MILES FROM THE INTERSECTION WITH SECOND STREET, BLACKHAWK TRAIL LANE WILL TURN TO GRAVEL AND TURN TO THE NORTH, HEADING UP A STEEP HILL TO THE DUMP. GO 0.7 MILES PAST THE DUMP ON YOUR LEFT AND THEN CONTINUE CLIMBING. YOU SHOULD SEE A FENCE ON YOUR RIGHT, UPHILL A SHORT DISTANCE FROM THE ROAD. THE FENCE WILL COME TO A ROCK-JACK WHERE IT CORNERS AND HEADS EAST FOR A SHORT WAYS BUT IT ENDS BECAUSE THE TOP OF THE RIDGE IS THE OUTSIDE EDGE OF A GRAVEL PIT. THE MONUMENT IS A 5/8" IRON ROD WITH A 2 1/2" ALUMINUM CAP AND IS A COUPLE OF FEET AWAY FROM THE ROCK-JACK, TO THE NORTHEAST.



EXPIRES 12/31/95

1 METER = 3.280833333333... U.S. FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM.

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

SHEET 19 OF 37