

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner originally established by David T. Thompson under GLO contract number 103, dated September 3, 1863. Surveyor General record states:

Set post for corner to Secs 29,30,31 & 32 in mound of earth with charred stake, pits, trench as per instructions

Corner remonumented by A.H. McLain in 1954 by survey number 20 Mr. McLain calls setting a 1" rod

Survey number 6-78 by Gregory T. Blackman calls finding a 5/8" rod at McLain's position




Description of corner evidence found:

Found 5/8 inch diameter iron rod called in survey number 6-78

Description of monument and accessories established to perpetuate the original location of this corner:

NONE

See survey number 17-84

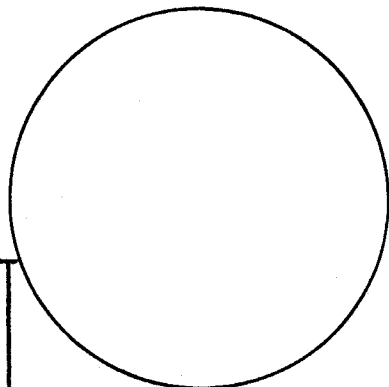

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

**UNION COUNTY
SURVEYOR**

Date Received 4-30-84

Date Filed 5-7-84

By G. LANGLITZ DEPUTY

File No. 855-84 R

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


History of original corner establishment:

Corner originally established by David Thompson under GLO Contract Number 103, dated 1863. Surveyor General record states:

Set post for cor. to secs. 29, 30, 31 and 32 in mound of earth with charred stake, pits and trenches.

Corner remonumented by Union County Survey Number 175 by L.D. Howland, Union County Surveyor. Map of Survey states:
Sec. Cor. iron pin.

Corner found by Gregory T. Blackman, OPLS 991 on Survey Number 6-78. Map of Survey states: Found 5/8" rod.



No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found 5/8"x18" round iron pin.

Found 5/8"x18" square iron pin approximately 0.1' East.

Description of monument and accessories I established to perpetuate the


original location of this corner: At the position of the found round 5/8" iron pin described above, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 36" in the ground, set in a water valve box, from which;

New Bearing Objects;

- A 5/8"x30" iron pin with 1 1/2" aluminum cap marked UNION COUNTY SURVEYOR RM 1 bears North 77° East, a distance of 19.74 feet.
- A 5/8"x30" iron pin with 1 1/2" aluminum cap marked UNION COUNTY SURVEYOR RM 2 bears South 54° East, a distance of 23.78 feet.
- A 5/8"x30" iron pin with 1 1/2" aluminum cap marked UNION COUNTY SURVEYOR RM 3 bears South 79° West, a distance of 25.82 feet.
- A 5/8"x30" iron pin with 1 1/2" aluminum cap marked UNION COUNTY SURVEYOR RM 4 bears North 54° West, a distance of 29.39 feet.

I hereby certify that the above corner point was perpetuated as hereon described on July 1, 1991.

Witnesses: Rick Robinson
Jim Bennett
John Osterman

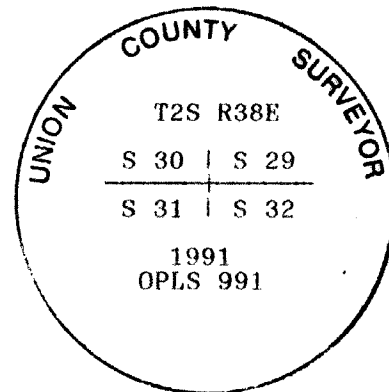

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to the center of the aluminum cap which is marked with a punch mark.

UNION COUNTY SURVEYOR

7-3-1991
7-3-1991

BY R. ROBINSON, DEPUTY

012-1991

HORIZONTAL CONTROL DATA

OREGON STATE PLANE, NORTH ZONE (3601)

LaGRANDE & ISLAND CITY, UNION COUNTY OREGON

STA. NAME: 9603

CORNER COMMON TO: 29, 30, 31 & 32

TWP. 2S, RGE. 38E, W.M.

DATE FD.: MARCH, 1996

SURVEYOR: WALTER L. CASWELL
PLS 737

FIRM: EAGLE GPS SURVEY CORP
6110 S.W. LOMBARD AVE.
BEAVERTON, OR. 97008
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 2

GEODETIC COOR: NAD 83(91)

LAT: 45°21'17.21854" N

LONG: 118°05'48.62998" W

SP. COOR: NAD 83(91)

N: 624627.901 INT.FT.

E: 8819756.565 INT.FT.

THETA: 1°42'15.430"

SCALE FACTOR: 0.999899843

ELEV: 2837.330 US.FT.

ELEV. DATUM: NGVD 29

DIRECTIONS "TO REACH"



EXPIRES 12/31/97

1 meter = 3.280833... U.S. Feet = 39.37 inches exactly
1 meter = 3.280839895 Intl. Feet or 1 inch = 2.54cm. exactly
To Calculate Elevation Factor (in the North American Continent)
Divide 20,906,000 by (20,906,000 + Ellipsoid Elev. in Feet)

JOB 96-007
SHEET 16 OF 66

GEODETIC CONTROL DATA

**OREGON STATE PLANE, NORTH ZONE (3601)
UNION COUNTY, OREGON**

STA. NAME: 9603

SECTION CORNER:	GEODETIC COOR: NAD 83(91)
SEC. 30 29	LAT: 45:21'17.21854" N
SEC. 31 32 TWP.2 S. RGE.38 E	LONG: 118:05'48.62998" W
UNION COUNTY, OREGON	SP. COOR: NAD 83(91)
DATE TIED: JULY, 1999	N: 624627.901 INT.FT
SURVEYOR: WALTER L. CASWELL	E: 8819756.565 INT.FT.
PLS 737	THETA: 1:42'15.430"
FIRM: EAGLE GPS SURVEY CORP	SCALE FACTOR: 0.999899843
6110 SW LOMBARD AVE.	ELEV: 2837.33 U.S.FT.
BEAVERTON, OR. 97008-4736	ELEV. DATUM: NGVD 1929(1947)
(503) 643-1073	*****
TYPE: GPS	DIRECTIONS "TO REACH":
ORDER: SECOND CLASS: 1	

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Albert Hertel 10-14-99

**OREGON
JULY 18, 1980
ALBERT HERTEL
1896**

EXPIRES: 06/30/01

1 METER = 3.280833... U.S. FEET = 39.37 INCHES EXACTLY
1 METER = 3.280839895 INTL. FEET OR 1 INCH = 2.54CM. EXACTLY
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

JOB 99-005
SHEET 20 OF 63