


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Timothy Davenport under GLO contract number 102 dated July 20, 1863. Surveyor General record states: Set qt sec post from which:
A spruce 12 in dia bears N30°E 28 lks dist
A spruce 7 in dia bears S50°W 62 lks dist



Corner subsequently monumented with a 3/4" iron pipe and used by survey numbers 35-69 and 6-78 Oregon State Highway Department strip map number 8B-36-3 also shows the 3/4" pipe as the 1/4 corner.

Description of corner evidence found:

Found 3/4"x30" iron pipe in mound of stone at position used in the above mentioned surveys.

Description of monument and accessories | established to perpetuate the original location of this corner:

In place of pipe, I set a 2 1/2"x 30" aluminum pipe with aluminum cap marked as shown, 26 inches in the ground.

Placed the found 3/4" pipe inside of the aluminum monument and raised mound of stone around monument.

Corner falls 3 feet West of an existing North-South fenceline and in line with an existing East-West fenceline on the West side of Fox Hill Road. Corner falls approximately 150 feet North and East of Fox Hill Road. Corner monumented April 23, 1987
Witness: Rick Robinson

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
22193 1983
GREGORY T. BLACKMAN
991


UNION COUNTY
SURVEYOR

Date Received 4-28-87

Date Filed 4-30-87

By G. LANGUTZ, Deputy

File No. 11-87 R

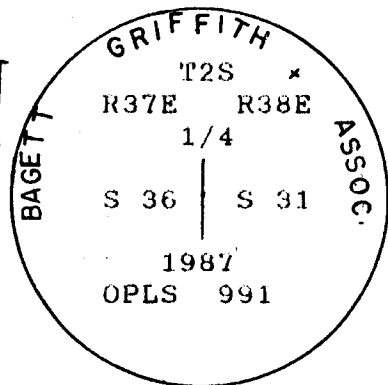

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)

HORIZONTAL CONTROL DATA

**UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)**

STA. NAME: 9224

QUARTER SECTION: E 1/4 COR

GEODETIC COOR: NAD 83(91)

SEC. 36 TWP ²/_{2 S} RGE 38 E ^{37 E}

LAT: 45 20'50.60794" N

DATE SURVEYED: MAY, 19, 1992

LONG: 118 06'59.84822" W

SURVEYOR: WALTER L. CASWELL
PLS 737

SP. COOR: NAD 83(91)

FIRM: EAGLE GPS SURVEY CORP
13545 NW SCIENCE PARK DR
PORTLAND, OR. 97229
(503) 643-1073

N: 621783.454 Int.Ft.

E: 8814752.976 Int.Ft.

THETA: 1 41'24.923"

TYPE: GPS

SCALE FACTOR: 0.999899433

ORDER: SECOND CLASS: 1

ELEV: 3003.06 US.Ft.

ELEV. DATUM: NGVD 29

DIRECTIONS "TO REACH"

From the intersection of Second Street and U.S. Highway 30 (Adams Ave.) proceed North on 2nd Street 1.2 miles to Black Hawk Trail Lane, continue Northerly on Black Hawk Trail Land .95 miles to Lone Ponderosa Pine Tree. Corner lies 2.9' West of fence line East of Dump Road (Fox Hill Road).

HORIZONTAL CONTROL DATA

OREGON STATE PLANE, NORTH ZONE (3601)
LAGRANDE & ISLAND CITY, UNION COUNTY OREGON

STA. NAME: 9224

QUARTER SECTION: E 1/4 COR
SEC. 36 TWP.3S, RGE.38E, W.M.
DATE FD.: MARCH, 1996
SURVEYOR: WALTER L. CASWELL
PLS 737

FIRM: EAGLE GPS SURVEY CORP
6110 S.W. LOMBARD AVE.
BEAVERTON, OR. 97008
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 1

GEODETIC COOR: NAD 83(91)
LAT: 45°20'50.60794" N
LONG: 118°06'59.84822" W
SP. COOR: NAD 83(91)
N: 621783.454 INT.FT.
E: 8814752.976 INT.FT.
THETA: 1°41'24.923"

SCALE FACTOR: 0.999899433

ELEV: 3003.160 US.FT.
(3003.06)
ELEV. DATUM: NGVD 29

DIRECTIONS "TO REACH"

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Walter L. Caswell
OREGON
JULY 9, 1968
WALTER L. CASWELL
737

EXPIRES 12/31/97

1 meter = 3.280833... U.S. Feet = 39.37 inches exactly
1 meter = 3.280839895 Intl. Feet or 1 inch = 2.54cm. exactly
To Calculate Elevation Factor (in the North American Continent)
Divide 20,906,000 by (20,906,000 + Ellipsoid Elev. in Feet)

JOB 96-007

SHEET 9 OF 66