


UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

No record of subsequent monumentation found in Union County survey records.

T 2 S R 38 E X-03



DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Survey No. 016-1996

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by Survey 016-1996, I set a 2 1/2" x 30" aluminum monument, marked as shown below, 30" in the ground from which:

A 5/8" x 30" rebar with 1 1/2" aluminum cap bears N59°E, a distance of 7.48 feet, marked UNION COUNTY SURVEYOR NE RP.

A 5/8" x 30" rebar with 1 1/2" aluminum cap bears S49°E, a distance of 13.25 feet, marked UNION COUNTY SURVEYOR SE RP.

A 5/8" x 30" rebar with 1 1/2" aluminum cap bears S59°W, a distance of 12.46 feet, marked UNION COUNTY SURVEYOR SW RP.

A 5/8" x 30" rebar with 1 1/2" aluminum cap bears N51°W, a distance of 8.12 feet, marked UNION COUNTY SURVEYOR NW RP.


Set steel fence post with BT sign N36°W, 10 feet.

I hereby certify that the corner was monumented on January 17, 2001
Witness: Norbert W. Volny and Gregory T. Blackman, Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: Dec. 31, 2001

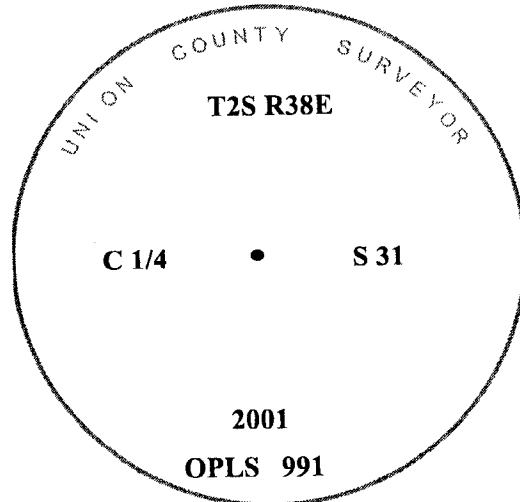

UNION COUNTY SURVEYOR

Date Received 2/13/01

Date Filed 3/2/01

Filed By R. ROBINSON, DEPUTY

File Number 004-2001R

I used a compass and steel tape in the establishment of the new accessories. I used 18° East declination. The distances are to the center of a 5/8"x30" rebar with 1 1/2" aluminum cap marked Union County Survey Marker.

**HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)**

STA NAME: 200109

CENTER QUARTER OF SECTION 31

TWP. 2 S. RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: 26 JAN. 2001

LAT: 45 ° 20 ' 50.84991 " N

SURVEYOR: GREGORY T. BLACKMAN
OPLS 991

LONG: 118 ° 6 ' 25.59053 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 621880.255 INT FT.

E: 8817197.657 INT FT.

TYPE: GPS

THETA: 1 ° 41 ' 49.2187401 "


ORDER: SECOND CLASS: 1

SCALE FACTOR: 0.9998994365

ELEV: 2808.34 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:



Renewal Date: Dec. 31, 2001

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)