


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT :**

Corner not previously established.

**DESCRIPTION OF CORNER EVIDENCE FOUND :**

None

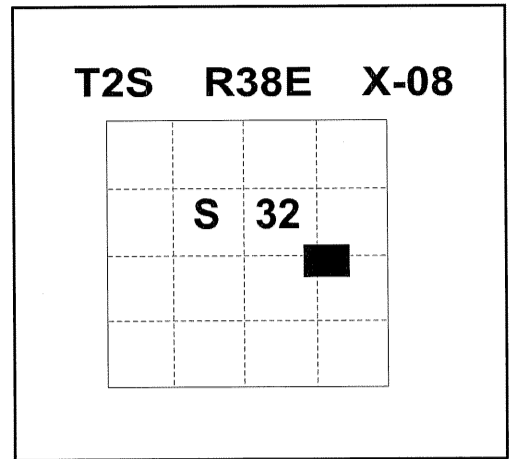

See Survey Number 040-2007

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER :**

At position determined by survey:

I set a 5/8"x30" iron pin with 2½" aluminum cap, in a gravel road flush with the ground, from which:

A 5/8" X 30" iron pin with yellow plastic cap, bears North 56°15'47" East, a distance of 36.11 feet, marked BGB SURVEY MARKER.

A 5/8" x 30" iron pin with 1½" aluminum cap bears North 0°04'23" East, a distance of 40.00 feet, marked N RP


I hereby certify that the corner was monumented on January 15, 2008.

Witnesses: Jeff Hsu

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2008

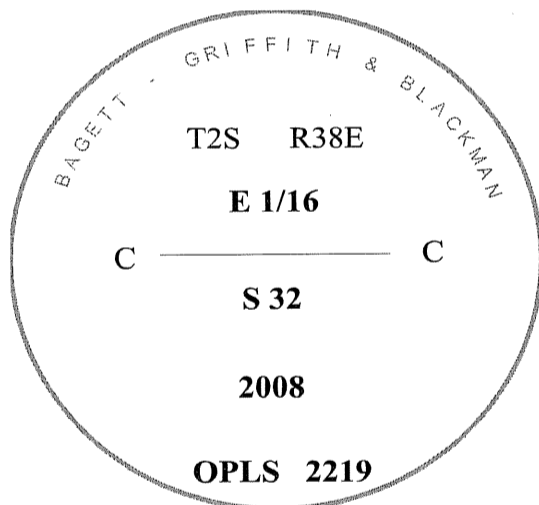

**UNION COUNTY  
SURVEYOR**

Date Received 1/15/08

Date Filed 4/5/08

Filed By [Signature]

File Number 002-2008 R

The bearing and distance to the reference points was determined by GPS observation using a Leica 500 base and receiver. The basis of bearing is that of Survey No. 040-2007.