


**UNION COUNTY SURVEYOR  
CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Surveys 5-68, 17-69, and 19-70, call a position for the corner.

Surveys 38-71, 14-74, 62-74, 82-77, and 24-81 call found monument of record.

Surveys 25-80, 6-87, 39-88, and 6-89 call found 5/8" iron pin.

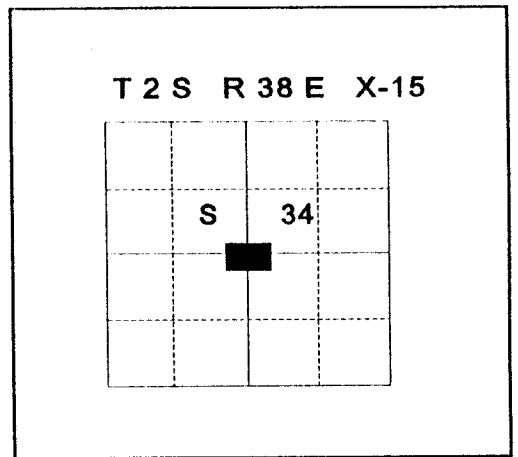

**Description of corner evidence found:**

Found 5/8" iron pin as per surveys listed.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

Replaced found 5/8" iron pin with 2 1/2" brass cap marked as shown below on a 5/8" x 24" copper rod set in valve box, from which:

**NEW BEARING OBJECTS:**

A 5/8" x 30" rebar with 1 1/2" aluminum cap bears N43°E, 34.45 feet marked UNION COUNTY SURVEYOR NE RP.

A PK nail in power pole bears S61°E, 27.76 feet.

A 5/8" x 30" rebar with 1 1/2" aluminum cap bears S59°W, 41.89 feet marked UNION COUNTY SURVEYOR SW RP.

A 5/8" x 30" rebar with 1 1/2" aluminum cap bears N37°W, 51.24 feet marked UNION COUNTY SURVEYOR NW RP.

I hereby certify that the corner was monumented on March 25, 1996.

Witness: Mark Durbin, Jeff Madsen

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gregory T. Blackman*

OREGON  
JULY 13, 1973  
**GREGORY T. BLACKMAN**  
991

*Renewal Date: December, 31 1997*

UNION COUNTY SURVEYOR

T 2 S R 38 E

C 1/4

S 34

1996

OPLS 991

**UNION COUNTY  
SURVEYOR**

Date Received 4-22-96

Date Filed 4-22-96

Filed By *A. Jensen, Deputy*

File Number 051-1996 R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East declination.

**HORIZONTAL CONTROL DATA**

OREGON STATE PLANE, NORTH ZONE (3601)

LaGRANDE & ISLAND CITY, UNION COUNTY OREGON

STA. NAME: 9610

CENTER QUARTER

SEC. 34 TWP.2S, RGE.38E, W.M.

DATE FD.: MARCH, 1996

SURVEYOR: WALTER L. CASWELL  
PLS 737

FIRM: EAGLE GPS SURVEY CORP  
6110 S.W. LOMBARD AVE.  
BEAVERTON, OR. 97008  
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 2

GEODETIC COOR: NAD 83(91)

LAT: 45°20'51.33391" N

LONG: 118°02'43.06335" W

SP. COOR: NAD 83(91)

N: 622405.938 INT.FT.

E: 8833080.532 INT.FT.

THETA: 1°44'27.031"

SCALE FACTOR: 0.999899444

ELEV: 2737.970 US.FT.

ELEV. DATUM: NGVD 29

\*\*\*\*\*  
DIRECTIONS "TO REACH"

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Walter L. Caswell*

OREGON  
JULY 8, 1968  
WALTER L. CASWELL  
737

EXPIRES 12/31/97

1 meter = 3.280833... U.S. Feet = 39.37 inches exactly  
1 meter = 3.280839895 Intl. Feet or 1 inch = 2.54cm. exactly  
To Calculate Elevation Factor (in the North American Continent)  
Divide 20,906,000 by (20,906,000 + Ellipsoid Elev. in Feet)

JOB 96-007  
SHEET 23 OF 66