

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner established by Thomas F. Lagier by Survey No. 56-73.

DESCRIPTION OF CORNER EVIDENCE FOUND:


No evidence found

See Survey No. 028-2000

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by Survey No. 028-2000 I set a 5/8" x 30" iron pin with 1 1/2" aluminum cap marked as shown below, 31" in the ground, from which;

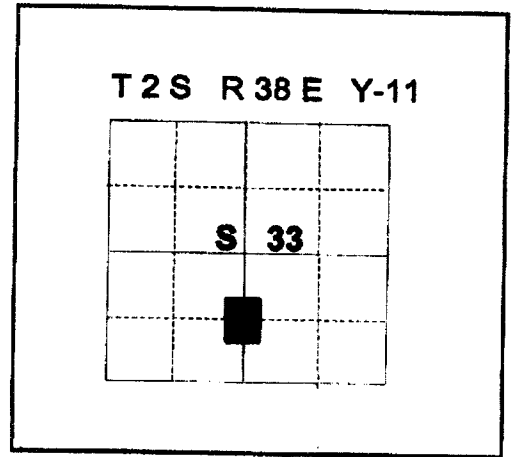

NEW BEARING OBJECTS:

A 60d spike 2 ft. above ground on the right side of a power pole #035335025 bears S10°W, 23.90 feet.

A 2" square metal shaft bears N59°W, 5.82 feet.


I hereby certify that the corner was monumented on September 19, 2000.
Witness: Norbert Volny and Greg T. Blackman Sr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 12, 1973
GREGORY T. BLACKMAN
991

Renewal Date: Dec. 31, 2001

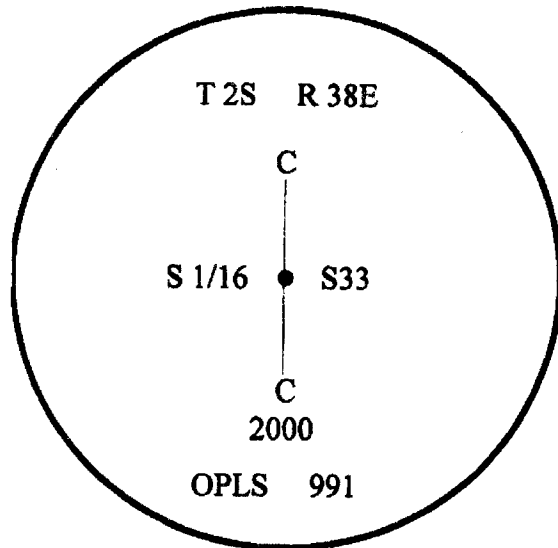

UNION COUNTY
SURVEYOR

Date Received 12/15/00

Date Filed 12/27/00

Filed By R. ROBINSON DEARY

File Number 032-2000R

I used a compass and steel tape in the establishment of the new accessories. I used 18° East declination, distances are to center of aluminum cap unless otherwise noted.