

R623

Form 9600-9
(December 1979)
(formerly 9100-6)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

67

FIELD NOTES

OF THE

REMONUMENTATION OF CERTAIN ORIGINAL CORNER POINTS,

TOWNSHIP 1 SOUTH, RANGE 39 EAST,

UNION COUNTY SURVEYOR	
Date Received <u>2-2-84</u>	
Date Filed <u>2-21-84</u>	
By <u>G. LANGLITZ, DEPUTY</u>	
File No. <u>800-84-R</u>	

SHEET 1/3

Of the WILLAMETTE Meridian,
in the State of OREGON

EXECUTED BY

Scott R. McIntyre, Cadastral Surveyor

Under special instructions dated July 13, 1979, approved July 17, 1979

_____, which provided for the surveys included under U.S. Survey/Group
Number 1000, and assignment instructions dated July 30, 1982.

Survey commenced September 15, 1982

Survey completed September 17, 1982

365.82

T. 1 S., R. 39 E., Willamette Meridian, Oregon

CHAINS

The following field notes describe the remonumentation of certain original corner points, township 1 south, range 39 east, Willamette Meridian, Oregon, as provided for in the Special Instructions, Group Number 1000, Oregon, dated July 13, 1979, "Investigation of Physical Evidence of Corner Positions and Accessories, Followed by Remonumentation of Corner Points, with New Accessories when Needed."

The remonumentation of original corner points was made at the request of the United States Forest Service, in conjunction with their Land Line Location Program.

The mean magnetic declination is 20° E.

South Boundary, T. 1 S., R. 39 E., Willamette Meridian, Oregon

(Remonumenting a corner established by Timothy W. Davenport, U. S. Deputy Surveyor, in 1863, and perpetuated by John W. Kimbrell, U. S. Deputy Surveyor, in 1888)

The cor. of secs. 1, 2, 35, and 36, on the S. bdy. of the Tp., determined at record distance from the remains of bearing trees mkd. by Kimbrell:

A decayed pine stump, 15 ins. diam., bears N. 44° E. 79 lks. dist., no marks visible.

A decayed pine stump, 18 ins. diam., bears S. 30° W. 63 lks. dist., no marks visible. (Record, S. 25° W.)

A root hole, bears N. 25° W., 71 lks. dist., with a down and decayed pine alongside, 16 ins. diam., with scribe marks S35 T15 R39E BT visible on open blaze.

At the corner point

Set an aluminum post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap mkd.

T 1 S R 39 E
S 35 | S 36
S 2 | S 1
T 2 S
1982

from which new bearing trees

A ponderosa pine, 12 ins. diam., bears N. 7° E., 101 lks. dist., mkd. T1S R39E S36 BT.

A fir, 15 ins. diam., bears S. 69° E., 37 1/2 lks. dist., mkd. T2S R39E S1 BT.

A ponderosa pine, 13 ins. diam., bears S. 34° W., 61 1/2 lks. dist., mkd. T2S R39E S2 BT.

A ponderosa pine, 10 ins. diam., bears N. 75° W., 53 lks. dist., mkd. T1S R39E S35 BT.

UNION COUNTY SURVEYOR

Date Received 2-2-84

Date Filed 2-21-84

By G. LANGLITZ DEPUTY

File No. 800-84R

SHEET 2/3

70

Remonumentation of Certain Original Corner Points,
T. 1 S., R. 39 E., Willamette Meridian, Oregon

CHAINS

Set a steel fence post alongside aluminum post.

East Boundary, T. 1 S., R. 39 E.,
Willamette Meridian, Oregon

(Remonumenting a corner established by Timothy W.
Davenport, U.S. Deputy Surveyor, in 1863)

The cor. of secs. 19, 24, 25, and 30, on the E. bdy. of
the Tp., determined at record distance from the remains
of the original bearing trees:

A decayed and sawed pine stump, 8 ins. diam., bears
N. 60° E., 110 lks. dist., with axe marks visible.

A decayed and sawed pine stump, 14 ins. diam., bears
S. 75° E., 87 lks. dist., with scribe marks BT
visible on open blaze. (Record, S. 80° E.)

At the corner point

Set an aluminum post, 28 ins. long, 2½ ins. diam., 20
ins. in the ground, to solid rock, in a mound of stone,
3 ft. base, to top, with aluminum cap mkd.

T 1 S
R 39 E | R 40 E
S 24 | S 19
S 25 | S 30
1982

from which new bearing trees

A fir, 12 ins. diam., bears N. 70° E., 43 lks.
dist., mkd. T1S R40E S19 BT.

A fir, 12 ins. diam., bears S. 28° E., 37 lks.
dist., mkd. T1S R40E S30 BT.

A fir, 14 ins. diam., bears S. 11° W., 35 lks.
dist., mkd. T1S R39E S25 BT.

A fir, 13 ins. diam., bears N. 67° W., 31½ lks.
dist., mkd. T1S R39E S24 BT.

Set a steel fence post alongside aluminum post.

Subdivisions, T. 1 S., R. 39 E.,
Willamette Meridian, Oregon

(Remonumenting a corner established by David P. Thompson,
U. S. Deputy Surveyor, in 1863, and
perpetuated by John W. Kimbrell,
U. S. Deputy Surveyor, in 1888)

The cor. of secs. 23, 24, 25, and 26, determined from the
remains of bearing trees mkd. by Kimbrell:

A root hole, bears S. 88° E., 33 lks. dist.
(Record, N. 88° E.)

UNION COUNTY
SURVEYOR

Date Received 2-2-84

Date Filed 2-21-84

By GLADLITZ, DEPUTY

File No. 800-84 R

SHEET 3/3


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Timothy W. Davenport under GLO contract number 102, dated July 20, 1863. Surveyor General record states:

Set post corner to Secs 1, 2, 35 and 36, from which:
 A Pine 10 in. dia. bears N55°E, 43 lks. dist.
 A Pine 10 in. dia. bears S20°E, 34 lks. dist.
 A Pine 10 in. dia. bears N15°W, 53 lks. dist.
 A Pine 14 in. dia. bears S25°W, 63 lks. dist.

T 1S R 39 E Z-21



In 1982, under Special Instructions, Group Number 1000, dated July 13, 1979, BLM Cadastral Surveyor Scott McIntyre reestablished corner from original GLO evidence. Field notes state (also filed as Union County monumentation record 800-84R):

A decayed pine stump, 15 ins. diam., bears N44°E, 79 lks. dist., no marks visible. A decayed pine stump, 18 ins. diam., bears S30°W, 63 lks. dist., no marks visible. A root hole, bears N25°W, 71 lks. dist., with a down and decayed pine alongside, 16 ins. diam., with scribe marks S35 T1S R39E BT visible on open blaze.

At the corner point, set an aluminum post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground from which new bearing trees:

A ponderosa pine, 12 ins. diam. bears N7°E., 101 lks. dist., mkd T1S R39E S36 BT.
 A fir, 15 ins. diam., bears S69°E, 37 1/2 lks. dist., mkd T2S R39E S1 BT.
 A ponderosa pine, 13 ins. diam., bears S34°W, 61 1/2 lks. dist., mkd T2S R39E S2 BT.
 A ponderosa pine, 10 ins. diam., bears N75°W, 53 lks. dist., mkd. T1S R39E S35 BT.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 2 1/2" aluminum pipe with 3" aluminum cap, marked as shown below, 4 inches above ground, from which:

A 23 inch Douglas Fir bears South 67° East, a distance of 24.70 feet, alive and vigorous with healed blaze.
 A 19 inch Ponderosa Pine bears South 35° West, a distance of 40.55 feet, alive and vigorous with healed blaze.
 A 13 inch Ponderosa Pine snag bears North 73° West, a distance of 35.00 feet.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

From the aluminum pipe monument, I take new accessories:


An 11 inch Ponderosa Pine bears North 61° East, a distance of 40.85 feet, marked T1S R39E S36 BT.
 An 11 inch Ponderosa Pine bears North 44° West, a distance of 4.40 feet, marked T1S R39E S35 BT.

I hereby certify that the corner was perpetuated on October 7, 2013.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2015

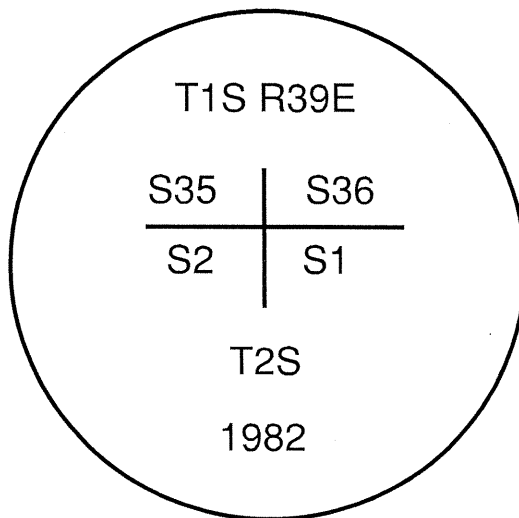

**UNION COUNTY
SURVEYOR**

Date Received 10/10/13

Date Filed 10/10/13

Filed By [Signature]

File Number 440-2013R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 16° East declination. The distances are to a 60d spike in the right hand side of the root crown of the new bearing trees. Bearings are to a brass washer marked OPLS 83571 in the lower BT blaze. Bearings and distances to the recovered trees are to the center of the root crown.