

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Original corner established in 1863 by T. Davenport under GLO Contract No. 102.


Set post corner to Secs 18, 19, 13 & 24. Made mound of earth and drove charred stake as per inst.

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Partition Plat 20140010T

T 2 S R 39 E N-01



DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Corner is reestablished at record position of survey in Old Book of Surveys - Page 261 (#118).

At position determined by survey, I set a 5/8" x 30" iron pin with a 2 1/2" aluminum cap 6" below the gravel surface of Sandridge Road, marked as shown below.

From which:

A 5/8" x 30" iron pin bears N48°45'46"E, 31.02', with a 1 1/2" aluminum cap marked NE RP.

A 5/8" x 30" iron pin bears S56°02'51"E, 27.51', with a 1 1/2" aluminum cap marked SE RP.

A 5/8" x 30" iron pin bears S54°25'42"W, 24.93', with a 1 1/2" aluminum cap marked SW RP.

A 5/8" x 30" iron pin bears N30°11'12"W, 48.44', with a 1 1/2" aluminum cap marked NW RP.


I hereby certify that the corner was monumented on May 30, 2014.

Witness: Thomas J. Kopp

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2014

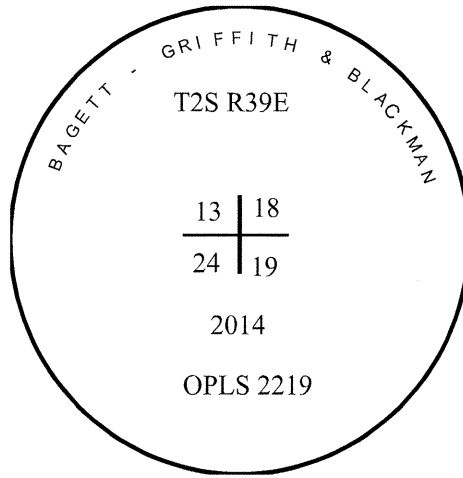

UNION COUNTY
SURVEYOR
Date Received 7/17/14
Date Filed 7/17/14
Filed By *[Signature]* DERBY
File Number 029-2014R

I use a Leica GS-15 RTK GPS in the establishment of these accessories. Basis of Bearing is as per Partition Plat Number 20140010T. Bearings and Distances are to the center of cap.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 201516

SECTION CORNER COMMON TO SECTIONS 13, 18, 19 AND 24

TWP. 2 S. RGE. 38 & 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: February 27, 2015

LAT: 45 ° 23 ' 2.84305 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 59 ' 37.64332 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 636124.698 INT FT.

E: 8845902.720 INT FT.

TYPE: GPS

THETA: 1 ° 46 ' 38.529195 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.9999016338

ELEV: 2750.87 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 ½" aluminum cap marked as shown
in centerline of Sandridge Road 6" below
road surface

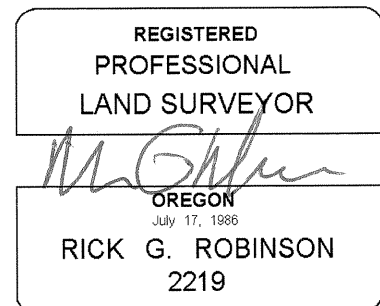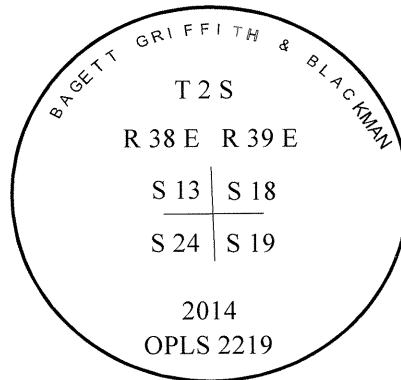

Renewal Date: December 31, 2016

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)