

CERTIFIED RECORD OF LAND CORNER MONUMENT


HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

The Southeast Sixteenth Corner of Section 22, Township 2 South, Range 39 East of the Willamette Meridian has not been established by the GLO, BLM or by any other Federal, State and County Agencies.

No information found for the establishment of the existing monument found by Merrick & Company.

DESCRIPTION OF CORNER EVIDENCE FOUND:

FOUND 16" DIA. OCTAGON SHAPED CONCRETE POST PROJECTING 8' ABOVE GROUND SURFACE.

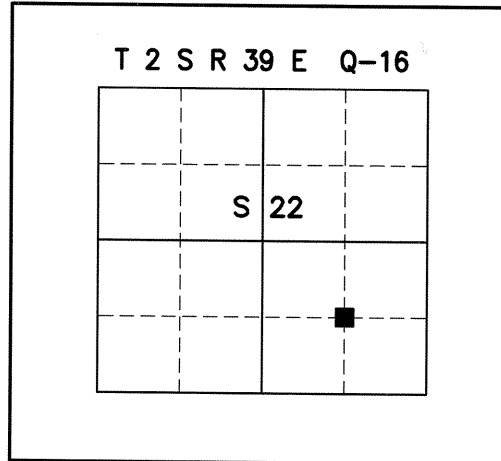

DESCRIPTION OF MONUMENT AND ACCESSORIES THAT I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

ACCEPTED FOUND 16" DIA. OCTAGON SHAPED CONCRETE POST

ACCESSORIES (BEARING OBJECTS):

- Set 18" long #5 rebar with 2" dia. alum. cap stamped "RP" flush with ground that bears S79°16'W from center of found monument, 15.4 feet.
- Set 18" long #5 rebar with 2" dia. alum. cap stamped "RP" flush with ground that bears N00°19'E from center of found monument, 18.8 feet.
- Set chiseled "x" on top of existing metal pivot leg on concrete pad that bears S61°42'E from center of found monument, 23.9 feet.
- Set chiseled "x" on top of existing concrete pad that bears S26°09'E from center of found monument, 24.6 feet.

I hereby certify that the corner was found on July 12th, 2019.
Witnessed by: Kevin Kenna & Seth Gould

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
NOVEMBER 7, 2011
VERNEN KALANI LEE
85504

EXPIRES: 12/31/2020


UNION COUNTY
SURVEYOR

DATE RECEIVED: 9/20/19

DATE FILED: 9/24/19

FILED BY: *Neil G. Miller*

FILE NUMBER: 050-201912

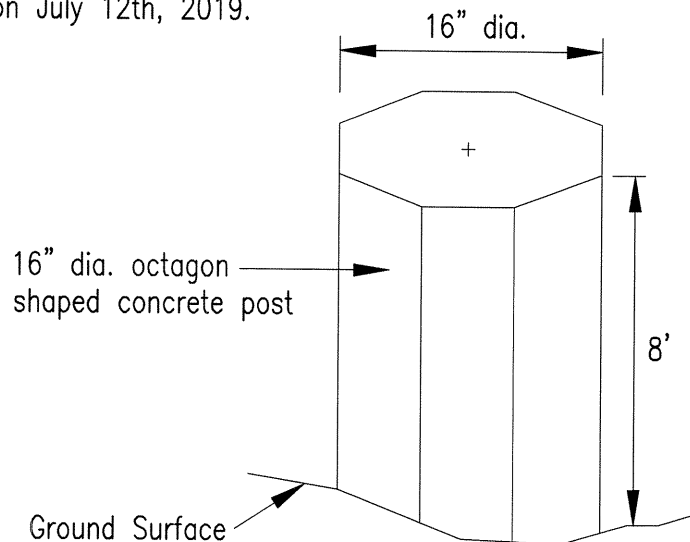

FIELD CREW USED A COMPASS OR GPS WITH STEEL TAPE FOR ESTABLISHMENT OF THE NEW ACCESSORIES. ALL DISTANCES STATED ARE HORIZONTAL DISTANCES FROM CENTER OF FOUND 16" DIA. OCTAGON CONCRETE POST TO THE STATED ACCESSORY.

Q-16