



CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**


Original General Land Office survey states:

Set a post 4 ft. long, 4 in. square, 24 in. in ground for cor. to secs. 4 and 9, marked T2S R40E on E, S4 on N, and S9 on S. face with 5 notches on S. and 4 notches on E. face from which a Tamarack, 4 in. diam. bears N51°E 41 lks. marked T2S S4 BT.

A Tamarack, 3 1/2 in. diam. bears S68°E 66 lks. marked R40E S9 BT

A Pine 5 in. diam., bears S30°W 90 lks., marked T2S BT.

A Tamarack 30 in. diam., bears N62°W 150 lks. dist., marked R40E BT.



**Description of corner evidence found:**

Found original bearing trees as follows:

(Orig. NE) A 16" W. Larch stump, previously opened, no markings visible.

(Orig. SE) A 16" W. Larch, alive and in good condition with well-healed blaze,

(Orig. NW) A 32" W. Larch, standing dead, with illegible scribing visible on a previously opened blaze.

The original SW bearing tree was destroyed in road construction. No evidence of the original corner post was found.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

At the original corner point as determined by measurement from the original BT's, we set a 2"x30" aluminum pipe, 22" in the ground and supported in a mound of stone, with aluminum cap marked:

T2S	R40E
S8	S4
	S9
PLS 1099	
1985	

From which the original bearing tree as previously described

A 16" W. Larch stump bears N51°E 27.1 ft.,

A 16" W. Larch bears S68°E 43.6 ft.,

and a 32" W. Larch snag bears N62°W 93.5 ft.,

We mark a new BT as follows:

A 16" W. Larch, scribed "T2S R40E BT" on a double blaze bears N80°W 12.0 ft.

No trees available to the East of the corner.

Attached brass washer marked "LS 1099" to lower blaze of new BT.

Magnetic compass (20° East Declination)

Steel Tape

Corner is located approx. 50 ft. North of the Pt. Prominence Road, on a steep North slope, and along the West edge of a clear-cut strip.

October 15, 1985

Gary L. Langlitz LS 1099  
Raymond McVey, Forester  
Boise Cascade Corporation

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*Gary L. Langlitz*

OREGON  
JULY 22, 1977  
GARY L. LANGLITZ  
1099

**UNION COUNTY SURVEYOR**

---

Date Received 11-18-85

Date Filed 11-18-85

By G. LANGLITZ, DEPUTY

File No. 102-85 R

Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by .....

(COUNTY OFFICIAL) (DEPUTY)

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200323

SECTION CORNER COMMON TO SECTIONS: 4 & 9 ONLY

TWP. 2 S. RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: November 2003

LAT: 45 ° 24 ' 45.28198 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 117 ° 49 ' 46.48662 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 647845.098 INT FT.

E: 8887727.793 INT FT.

TYPE: GPS

THETA: 1 ° 53 ' 37.7692611 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999036214

ELEV: 4055.00 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

Corner is 2 1/2" brass cap monument  
25 ft. North of main road

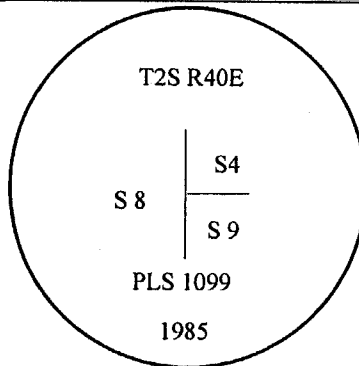

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date December 31, 2004

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)