


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This $\frac{1}{4}$ corner was set by Deputy Surveyor Henry Meldrum under Contract No. 450 dated June 11, 1882. He states he set a post 3 ft. long 3 ins. sq. 24 in. in the ground for $\frac{1}{4}$ sec. cor. marked $\frac{1}{4}$ S on the north face; from which
A pine 5 in. dia. bears N 58 W, 14 lks. dist. marked $\frac{1}{4}$ S BT.
A pine 5 in. dia. bears S 34 W, 16 lks. dist. marked $\frac{1}{4}$ S BT.



Description of corner evidence found:

Due to heavy logging in the early days there is no trace of evidence in the area of this $\frac{1}{4}$ corner and there seems to be some large disagreement in call to a small break to the west of this corner thus was not able to use this call to assist in establishing the true $\frac{1}{4}$ corner position.

Description of monument and accessories established to perpetuate the original location of this corner:

With no available evidence of the original $\frac{1}{4}$ corner, I deemed it necessary to establish the position of the $\frac{1}{4}$ corner by proportionate measurements and thus set a Brass Cap on a 2 in. x 30 in. galvanized iron pipe set within 2 in. of the surface, from which I set two bearing trees:

A White Fir 5 in. dia. bears N 05 27 W, 17.80 ft. (Horiz. dist.) and scribed $\frac{1}{4}$ S 32 BT.

A Douglas Fir 9 in. dia. bears S 16 33 W, 14.0 ft. (Horiz. dist.) and scribed $\frac{1}{4}$ S 5 BT.

UNION COUNTY SURVEYOR
Date Received 12-12-86
Date Filed 12-22-86
By G. LANGLITZ, DEPUTY
File No. 317-86 R

REGISTERED PROFESSIONAL LAND SURVEYOR
James H. Hambleton
12-10-86
OREGON
JULY 10, 1964
JAMES H. HAMBLETON
645

SEE SURVEY 37-86

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200325

1/4 SECTION CORNER COMMON TO SECTIONS: 32 & 5

TWP. 1and2 S. RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: November 2003

LAT: 45 ° 25 ' 39.354916 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 50 ' 23.65294 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 653231.036 INT FT.

E: 8884897.801 INT FT.

TYPE: GPS

THETA: 1 ° 53 ' 11.4114246 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999047702

ELEV: 3994.22 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is 2 1/2" brass cap monument

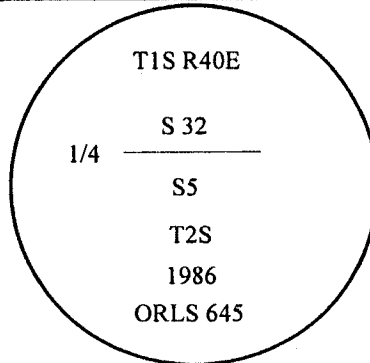

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 2004

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)