

Form 6000-9
December 1978
Inventory 0100-0

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

R62B

23

FIELD NOTES

OF THE

RECORRECTION OF CERTAIN ORIGINAL CORNER POINTS,

TOWNSHIP 1 SOUTH, RANGE 40 EAST,

WILLAMETTE BASIN

UNION COUNTY
SURVEYOR

Date Received 9-19-84

Date Filed 9-26-84

By G. LANGLITZ, DEPUTY SHEET 1/3

File No. 943-84R

REFER TO UNION CO. SURVEYOR MICROFILM RECORDS T1S R40E FOR MICROFILM C

Of the WILLAMETTE Section,

In the State of OREGON

EXECUTED BY

Scott R. McIntyre, Cadastral Surveyor

Under special instructions dated July 13, 19 79, approved July 17, 1979

Number 1000, which provided for the surveys included under U.S. Survey/Group
and assignment instructions dated July 30, 19 82.

Survey commenced September 15, 19 82

Survey completed September 17, 19 82

UNION COUNTY
SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 943-84R

SHEET 2/3

85 25

The following descriptions describe the re-estab-
lishment of certain original corner points, Township 1 South,
Range 40 East, Willamette Meridian, Oregon, as provided
for in the Special Instructions, Group No. 1000, Oregon,
dated July 30, 1979, "Investigation of Typical Evidence
of Corner Positions and Annotations, Followed by Re-estab-
lishment of Corner Values and the Annotations When
Needed".

The re-estabishment of original corner points was
made at the request of the United States Forest Service,
in conjunction with their Land Use Location Program.

The magnetic declination is 20° E.

South Boundary, T. 1 S., R. 40 E.,
Willamette Meridian, Oregon

(Cornering corners established by Henry Haldren,
U. S. Deputy Surveyor, in 1882)

The cor. of sec. 1 and 36, on the S. bdy. of the
Tp., determined from the remains of the original bearing
trees:

A larch snag, 15 inch diam., bears S. 34° E., 15
lbs. dist., with scribe marks & S RT visible on
open blade. (Height, 14 lbs.)

A larch snag, 11 inch diam., bears N. 40° W., 2
lbs. dist., with scribe marks & S RT visible
on open blade.

At the corner point

Set on aluminum post, 20 inch long, 2 1/2 inch diam., 17
inch in the ground, to which rock, and 1/2 a mound of
stone, 3 ft. base, to top, with aluminum cap and.

T 1 S
R 40 E

from which new bearing trees

A fir, 12 inch diam., bears N. 74° E.,
49 lbs. dist., and 4 S RT

A fir, 15 inch diam., bears S. 2° W.,
22 1/2 lbs. dist., and 4 S RT.

Corner is located 3 lbs. N. of a wire fence, extending E.
and W.

The cor. of sec. 4, 5, 32, and 33, on the S. bdy. of the
Tp., determined at record bearing and distance from the
remains of the original bearing trees:

A stump hole, bears N. 62° E., 30 lbs. dist., with
a down pine alongside, 12 inch diam., with scribe
marks S33 RT visible on open blade.

Reconnaissance of Certain Original Corner Points,
T. 1 N., R. 40 E., Willamette Meridian, Oregon

	<p>CRASS</p> <p>At the corner point</p> <p>Set an aluminum post, 20 in. long, 2 1/2 in. diam., 20 in. in the ground, with aluminum cap and</p>	<p>A decayed pine stump, size indeterminate, bears S. 22° E., 21 1/2 lbs. dist., with illegible corbe on top, and great, you cannot see it.</p> <p>A pine stump, 12 in. diam., bears S. 15° E., 20 lbs. dist., with corbe marks ST visible on partially-barked base.</p> <p>At the corner point</p> <p>Set an aluminum post, 20 in. long, 2 1/2 in. diam., 20 in. in the ground, with aluminum cap and</p> <p>T. 1 N., R. 40 E.</p> <p>S 22 1/2 E</p> <p>21 1/2</p>
<p>ON COUNTY SURVEYOR</p> <p>received</p> <p>d</p> <p>943-84 R</p>		<p>from which now bearing trees</p> <p>A larch, 14 in. diam., bears N. 8° E., 6 1/2 lbs. dist., wh. T18 MARK S13 ST.</p> <p>A lodgepole pine, 12 in. diam., bears S. 79° E., 7 1/2 lbs. dist., wh. T18 MARK S14 ST.</p> <p>A fir, 17 in. diam., bears S. 16° E., 15 lbs. dist., wh. T18 MARK S15 ST.</p> <p>A fir, 11 in. diam., bears N. 65° E., 29 lbs. dist., wh. T18 MARK S12 ST.</p>
<p>SHEET 3/3</p>		<p>Corner is located S. 24° E., 16 lbs. dist., from a fence corner, with wire fences extending N. 20° W., S. 5° E., and E.</p> <p>Subdivision, T. 1 N., R. 40 E., Willamette Meridian, Oregon.</p> <p>(Reconnaissance corners established by Henry Malcolm, U. S. Deputy Surveyor, in 1882)</p> <p>The cor. of secs. 28, 29, 32, and 33, monumented with a rock crib, 4 ft. base, 3 1/2 ft. high, at intersection of wire fences extending N. and E., from which the remains of the original bearing tree)</p> <p>A stump hole, bears S. 23° N., 168 lbs. dist., with a down pine alongside, size indeterminate, with incorrect corbe marks T18 MARK S12 ST visible on open base.</p> <p>At the corner point</p> <p>Set an aluminum post, 20 in. long, 2 1/2 in. diam., 20 in. in the center of rock crib, with aluminum cap and</p> <p>T. 1 N., R. 40 E.</p> <p>S 23 N</p> <p>168</p> <p>from which now bearing trees</p>

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200435

SECTION CORNER COMMON TO SECTIONS 32, 33, 4 and 5

TWP. 1 and 2 S. RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: December, 2004

LAT: 45 ° 25 ' 39.39527 " N

SURVEYOR: GREGORY T. BLACKMAN
OPLS 991

LONG: 117 ° 49 ' 46.57384 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 Adams Avenue
La Grande, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 653322.336 INT FT.

E: 8887540.463 INT FT.

TYPE: GPS

THETA: 1 ° 53 ' 37.7074101 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.999904771

ELEV: 3974.29 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

3" Aluminum monument marked:

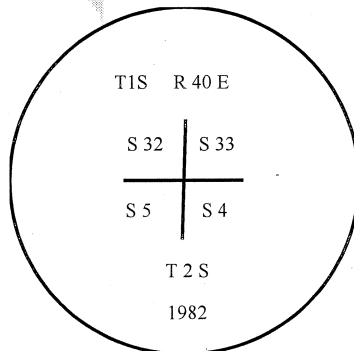

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2005

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM


TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Henry Meldrum under Contract No. 450, dated June 11, 1882. Surveyor General records states:
 Set post 4 ft. long, 4 in. square 24 in. in ground for Cor to Secs 4, 5, 32 and 33, from which:
 A pine 4 in. diam. bears N60°W, 9 lks. dist., marked R40E S32 BT.
 A pine 4 in. diam. bears S18°W, 28 lks. dist., marked S5 BT.
 A pine 4 in. diam., bears S52°E, 21 lks. dist., marked T2S S4 BT.
 A pine 5 in. diam., bears N62°E, 30 lks. dist., marked T1S S33 BT.

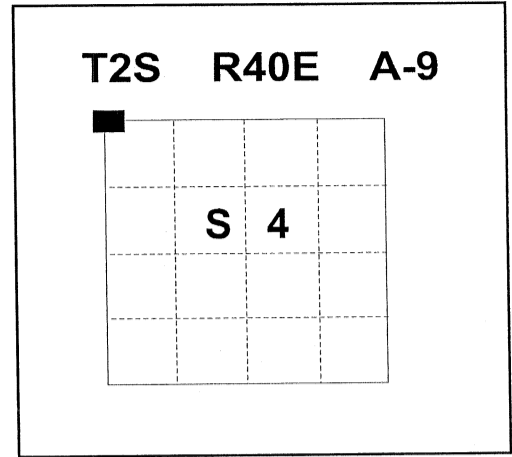

Corner was remonumented from original corner evidence by BLM Surveyor Scott R. McIntyre, under special instructions dated July 13, 1979, approved July 17, 1979 under Group Number 1000. BLM Field Notes state:

The cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., determined at record bearing and distance from the remains of the original bearing trees:
 A stump hole, bears N. 62° E., 30 lks. dist., with a down pine alongside, 12 ins. diam., with scribe marks S33 BT visible on open blaze.
 A decayed pine stump, size indeterminate, bears S. 52° E., 21 lks. dist., with illegible scribe marks visible on fragments of detached blaze.
 A pine snag, 12 ins. diam., bears S. 18° W., 28 lks. dist., with scribe marks BT visible on partially healed blaze.
 At the corner point, set an aluminum post, 28 ins. long, 2 ½ ins. diam., 23 ins. in the ground, with aluminum cap mkd., from which new bearing trees
 A larch, 14 ins. diam., bears N. 8° E, 64 ½ lks. dist., mkd. T1S R40E S33 BT.
 A lodgepole pine, 17 ins. diam., bears S. 79° E., 77 lks. dist., mkd. T2S R40E S4 BT.
 A fir, 17 ins. diam., bears S. 16° W., 15 lks. dist., mkd. T2S R40E S5 BT.
 A fir, 11 ins. diam., bears N. 65° W., 29 lks. dist., mkd. T1S R40E S32 BT.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 2 ½" aluminum pipe with 3" aluminum cap, marked as shown below, 3 inches above ground, from which:
 A stump bears North 8° East, a distance of 42.6 feet, no scribe marks visible.
 A 19 inch lodgepole pine bears South 77° East, a distance of 50.80 feet, alive and vigorous with scribe marks visible on an open blaze.
 A 29 inch white fir bears South 18° West, a distance of 9.90 feet, alive and vigorous with healed blaze.
 A 16 inch white fir bears North 65° West, a distance of 19.40 feet, alive with healed blaze and dead top.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED


TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

NEW BEARING TREE:

A 5 inch White Fir bears North 16° East, a distance of 29.70 feet, marked X BT.


I hereby certify that the corner was rehabilitated on May 9, 2013

REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2015

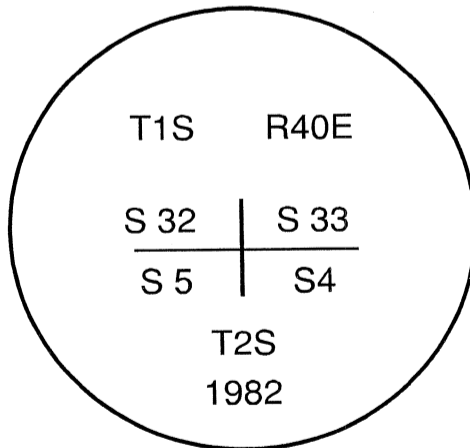

**UNION COUNTY
SURVEYOR**

Date Received 5/13/13

Date Filed 5/13/13

Filed By [Signature]

File Number 409-2013R

I used a compass and steel tape in the measurements to the bearing trees. I used 16° East declination. Bearings and distances are to center of the recovered trees. Distances to the new bearing tree are to a 60d spike in the right hand side of the root crown. Bearing is to a brass washer marked OPLS 83571 in the lower BT blaze.