


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. ^A ~~X~~-15 (T2S R40E)

History of original corner establishment:

Corner was originally established by Henry Meldrum, under Contract No. 450, June 11, 1882. Surveyors General's notes state: "Set post, 3 ft. long, 3 ins. sq., 24 ins. in the ground, for 1/4 sec. cor., mkd. 1/4S on N. face; from which a tamarack, 18 ins. diam., bears S43°E., 64 lks. dist. mkd. 1/4S BT. A fir, 15 ins. diam., bears N46°E, 52 lks. dist. mkd. 1/4S BT."

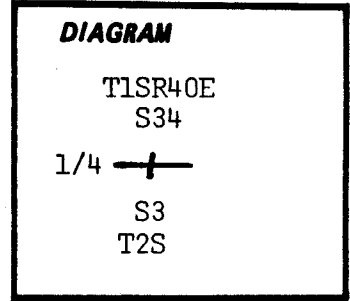

Description of corner evidence found:

Found no trace of record post. Found 30" white fir snag with open blaze and scribing. Measured S46°E, 34.3 ft. and found rotten stump bearing S43°E, 42.2 ft.

Description of monument and accessories I established to perpetuate the original location of this corner:


At the above point set 2 1/2" X 30" galvanized pipe and brass cap marked: Set pipe 24" in the ground, No rock in the area.

From which by magnetic declination on N20°E;

A 16" white fir bears N52°E, 23.3 ft. scribed 1/4S34 BT.

A 9" white fir bears S69°E, 42.4 ft. scribed 1/4S3 BT.

Painted blazes red and 6" red band around. Placed 54↔3s, 54↔4s and brass washers stamped PLS 1051 on BTs. Placed 54↔2 and 54↔4 on steel fence post 5' east of the corner.

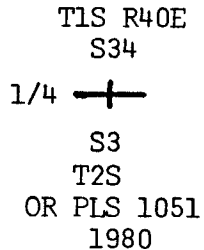

I hereby certify that the above corner monument was reestablished as herein described,

Witnesses: Ray McVey
Daniel Rowland
Doug Moser
Ron Gilroy

November 19, 1980

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Barry B. Barbour

OREGON
OCT. 17, 1975
BARRY B. BARBOUR
1051

Office of..... County Surveyor..... County of..... Union.....
State of..... Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 30th day of..... January....., 1981.
..... by
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**

Date Received _____
Date Filed [★] 990-798-276 _____
By _____
File No. 340-84B