


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

Index File No. <sup>A</sup> ~~8~~-19 (T2S R40E)

**History of original corner establishment:**

Corner was originally established by Henry Meldrum, Deputy Surveyor, under Contract No. 450, dated June 11, 1882, Surveyors General's notes state: "Set post, 3 ft. long, 3 ins. sq., 24 ins. in the ground, for 1/4 sec. cor., mkd. 1/4 on N. face; from which; A fir, 24 ins. diam., bears S04°E, 38 lks. dist. mkd. 1/4S BT. A fir 15" diam., bears N02°W, 14 lks. dist. mkd. 1/4S BT."

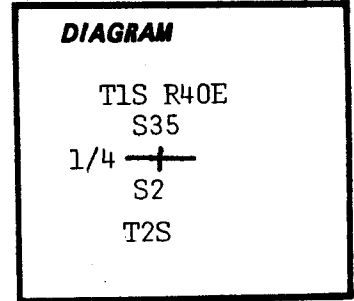


**Description of corner evidence found:**

Found no trace of record post. Found 38" white fir, barked, scribed 1/4S BT. Measured N04°W, 25.1 ft. from which a rotten stump is N02°W, 9.2 ft.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

At the above point set 2 1/2" X 30" galvanized pipe and brass cap marked; Set pipe 24" in the ground, No rock in the area.

From which by magnetic declination of N20°E,  
An 11" tamarac bears N16°E, 27.0 ft, scribed 1/4S35 BT.  
A 9" white fir bears S 50°E, 5.3 ft, scribed 1/4S2 BT. Painted blazes red and 6" red band around. Placed 54-3s, 54-4s and brass washers stamped PLS 1051 on BT.s Placed 54-2 and 54-4 on steel fence post 5' west of the corner,



I hereby certify that the above corner monument was reestablished as herein described.

Witnesses: Ray McVey  
Daniel Rowland  
Doug Moser  
Ron Gilroy

November 19, 1980

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Barry B. Barbour*

OREGON  
OCT. 17, 1975  
BARRY B. BARBOUR  
1051

Office of...County Surveyor..... County of...Union.....  
State of...Oregon..... I hereby certify that the within instrument was filed in this office  
for record on the...30th day of...January....., 1981.

(COUNTY OFFICIAL)

(DEPUTY)

**UNION COUNTY  
SURVEYOR**

Date Received \_\_\_\_\_  
★ OPO-798-276  
Date Filed \_\_\_\_\_  
By \_\_\_\_\_  
File No. 332-84 R