

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner established by J.W. Kimbrell, dated June 20, 1890. Page 252 Old Book of Surveys states:

Set post in mound of stone for 1/16 corner from which:


8" Pine bears N 87°W 28 lnks

No record of subsequent monumentation found in UNION COUNTY survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

NONE

See Survey Number 031-1999.

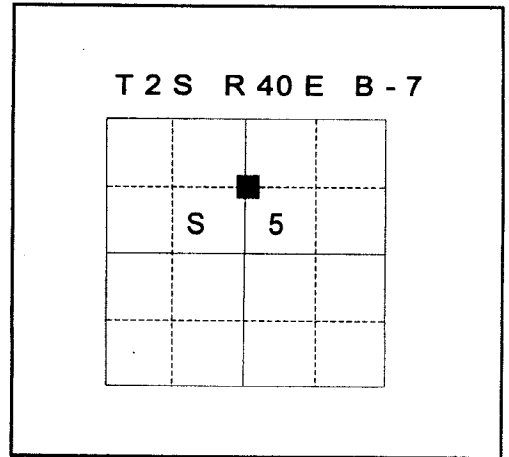

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 5/8" x 30" iron rod with 1 1/2" aluminum cap marked as shown below, 30" in the ground, from which:

**NEW BEARING TREES:**

A 13" diameter Tamarack bears N 77°E, a distance of 73.47 feet, marked "X BT"


A 13" diameter Tamarack bears N 24°W, a distance of 33.20 feet, marked "CN1/16 S5 BT"

I hereby certify that the corner was monumented on August 20, 1999.

Witnesses: Norbert W. Volny, Gregory T. Blackman Jr.



Renewal Date December 31, 1998

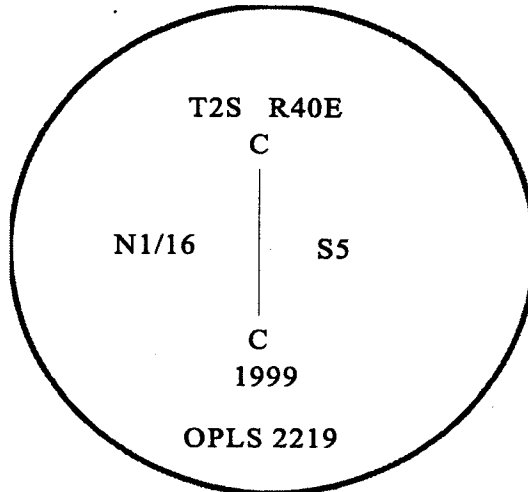

**UNION COUNTY SURVEYOR**

Date Received 8/26/99

Date Filed 10/8/99

Filed By Gregory T. Blackman

File Number 027-1999R

I used a Leica TCA-1100 and circular prism in the establishment of new accessories. The Basis of Bearing is the same as Survey No. 031-1999. The distance to the bearing tree is to a 50d spike driven on the right side of the tree at the root crown. I attached a brass washer marked OPLS 2219 to the BT blaze.