

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
Corner not previously established

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE

See Survey Number 031-1999.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 5/8" x 30" iron rod with 1 1/2" aluminum cap marked as shown below, 29" in the ground, from which:

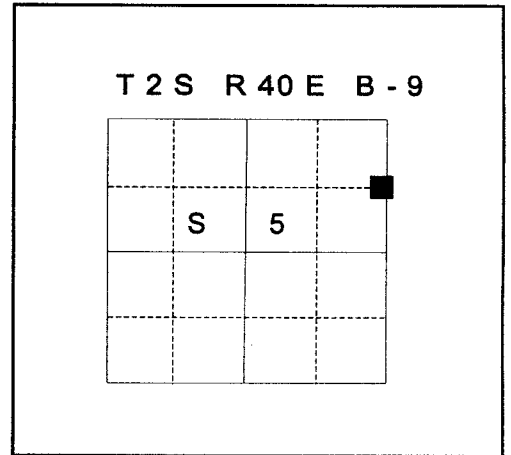


NEW BEARING TREES:

A 24" diameter Douglas Fir bears S 44°E, a distance of 81.07 feet, marked "N1/16 S4 BT"

A 18" diameter Tamarack bears S 48°W, a distance of 44.80 feet, marked "N1/16 S5 BT"

I hereby certify that the corner was monumented on August 19, 1999.
Witnesses: Norbert W. Volny, Gregory T. Blackman Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR
Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219
Renewal Date December 31, 1998

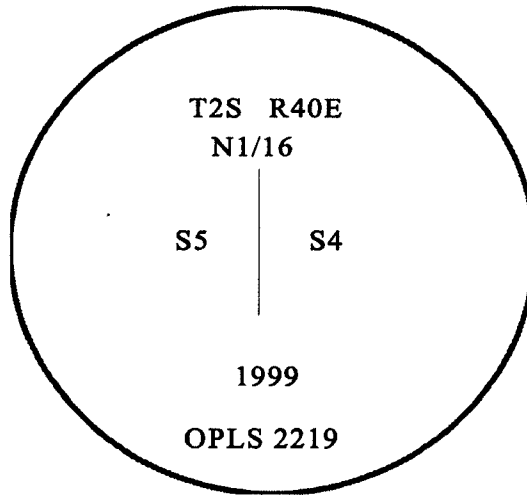

**UNION COUNTY
SURVEYOR**
Date Received 8/26/99
Date Filed 10/8/99
Filed By *Gregory T. Blackman Jr.*
File Number 028-1999R

I used a Leica TCA-1100 and circular prism in the establishment of new accessories. The Basis of Bearing is the same as Survey No. 031-1999. The distance to the bearing tree is to a 50d spike driven on the right side of the tree at the root crown. I attached a brass washer marked OPLS 2219 to the BT blaze.