

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by Timothy Davenport, under GLO Contract No. 102, dated July 20, 1863. Surveyor General record states:

Set gr Sec. post, from which:

A Pine 24 inch in. dia. bears S83E, 236 lks. dist.  
A Pine 16 inch in. dia. bears N68W, 246 lks. dist.

In Survey 113, dated September 1959, James Voelz sets a 7 ft. long 2" pipe from original corner evidence.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found a 2" iron pipe 5 1/2 ft. above ground, in a collar of stone 3 ft. diam., from which:

A 30 inch pine snag bears South 82° East, a distance of 157.2 feet, with scribe marks visible on an opened blaze.

A 28 inch Ponderosa Pine bears North 67° West, a distance of 163.4 feet, alive and vigorous with scribe marks visible on an opened blaze.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**


From the 2" iron pipe position, I take new bearing trees:

A 13 inch Ponderosa Pine bears North 43° East, a distance of 134.20 feet, marked 1/4 S6 BT.

A 13 inch Ponderosa Pine bears South 83° East, a distance of 68.05 feet, marked 1/4 S6 BT.

An 18 inch Ponderosa Pine bears South 66° West, a distance of 105.90 feet, marked 1/4 S1 BT.

I hereby certify that the corner was perpetuated September 30, 2013.

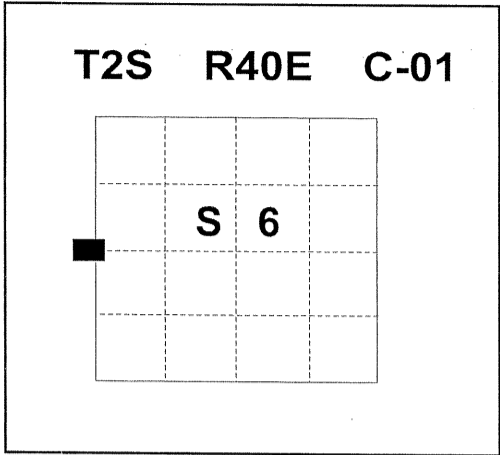

Renewal Date: June 30, 2015

I used a compass and steel tape in the establishment of the new accessories. I used 16° East declination. Distances to the new bearing trees are to a 50d spike in the right hand side of the tree. Bearings to the original bearing trees are to the center of the tree. Distances are to the face of the scribe.

**UNION COUNTY SURVEYOR**

Date Received 10/16/13

Date Filed 10/10/13

Filed By MLG

File Number 436-2013R