


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Timothy Davenport, under GLO Contract No. 102, dated July 20, 1863. Surveyor General record states:

Set post corner to Secs 1, 6, 7 and 12, from which:
A Pine 18 inch in dia. bears S72W 105 lks. dist.
A Spruce 14 inch in dia. bears N28E 65 lks. dist.
A Pine 16 inch in dia. bears S55E 75 lks. dist.
A Spruce 8 inch in dia. bears N47W 109 lks. dist.

In Survey 113, dated September 1959, James Voelz sets a 7 ft. long 2" pipe from original corner evidence.

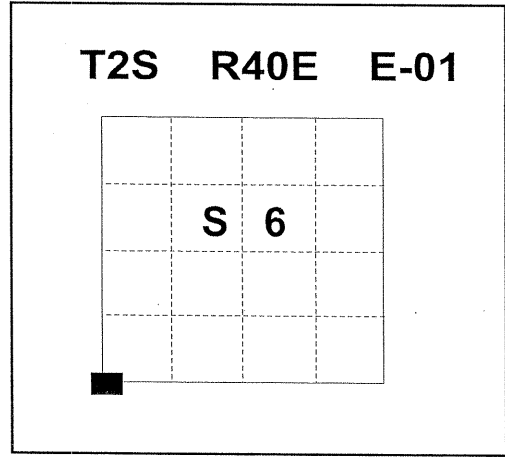

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 2" iron pipe 6 ft. above ground, from which:

An uprooted pine snag bears approximately South 35° West, 50 feet, with scribe marks visible on an opened blaze. The original position of the tree cannot be ascertained. No remains of the other original accessories remain. Because it was evident that Voelz had original corner evidence, I accept the position of the iron pipe as the true corner position.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

From the 2" iron pipe position, I take new bearing trees:

A 22 inch Western Larch bears North 38° East, a distance of 22.00 feet, marked T2S R40E S6 BT.

An 8 inch White Fir bears South 62° East, a distance of 20.95 feet, marked T2S R40E S7 BT.

A 10 inch White Fir bears South 75° West, a distance of 21.50 feet, marked T2S R39E S12 BT.

A 14 inch Western Larch bears North 15° West, a distance of 6.50 feet, marked T2S R39E S1 BT.

I hereby certify that the corner was perpetuated September 30, 2013.



I used a compass and steel tape in the establishment of the new accessories. I used 16° East declination. Distances to the new bearing trees are to a 50d spike in the right hand side of the tree.

UNION COUNTY SURVEYOR

Date Received 10/10/13

Date Filed 10/10/13

Filed By MLG

File Number 435-2013R