

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

E-13


History of original corner establishment:

Corner established by Henry Meldrum under GLO Contract No. 450 and dated June 11, 1882.

Surveyor General records state:

Set post 4 ft long 4 in square 24 in in ground for Cor to Secs 3,4,9 & 10 marked T2SS3 on NE, R40ES4 on NW, S9 on SW and S10 on SE with 5 notches on S and 3 on E edges from which:

- A tamarack 6 in diam bears N35°E, 86 lks dist marked T2SS3 BT.
- A fir 10 in diam bears N38°W, 66 lks dist marked R40ES4 BT.
- A tamarack 17 in diam bears S66°W, 68 lks dist marked R40ES9 BT.
- A fir 20 in diam bears S40°E, 118 lks dist marked S10 BT.

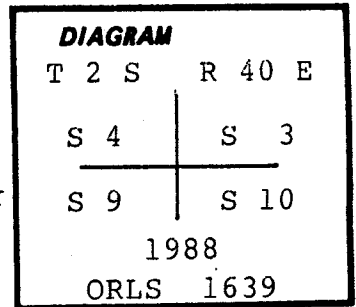

Description of corner evidence found:

No trace of wood post.

A western larch 22" diam mkd with "3" scribe and a portion of an "S" scribe inside 7" overgrowth brs N35°E, 86 lks dist per record from reestablished corner position. Did not find other record BT's.

| |
|----------------------------------|
| UNION COUNTY SURVEYOR |
| Date Received <u>9-22-88</u> |
| Date Filed <u>9-23-88</u> |
| By <u>G. LANGLITZ, DEPUTY</u> |
| File No. <u>134-88 R</u> |

Description of monument and accessories established to perpetuate the original location of this corner:

At position determined by reversed record bearing and distance from recovered original section 3 BT...

Set a 2"x30" aluminum pipe with 2½" aluminum cap attached 26 inches in ground with surrounding earthen mound & a steel fence post alongside with sign 54-9 attached. Cap marked as shown in corner diagram.

New bearing trees established:

- A western larch 9" diam brs N27°E, 29.9' dist mkd T2SR40ES3 BT.
- A western larch 9" diam brs N61°W, 44.5' dist mkd T2SR40ES4 BT.
- A western larch 13" diam brs S10½°W, 80.7' dist mkd T2SR40ES9 BT.
- A western larch 7' diam brs S78½°E, 22.8 ft dist mkd T2SR40ES10 BT.

Each BT has a sign 54-3 & 54-9 attached below a 6" band of red paint, and each new BT has a brass washer marked PLS 1639 nailed flush with BT blaze.

Compass declination 20° East.

I hereby certify that the above described corner monument was properly remonumented by me and witnessed by Bill Gohring on July 12, 1988.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

William L. Hanley

OREGON
JULY 14, 1978
WILLIAM L. HANLEY
1639

Office of.....County Surveyor..... County of.....Union.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

E-13