

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:


Corner not previously established.

No record of monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Map of survey number 021-2004

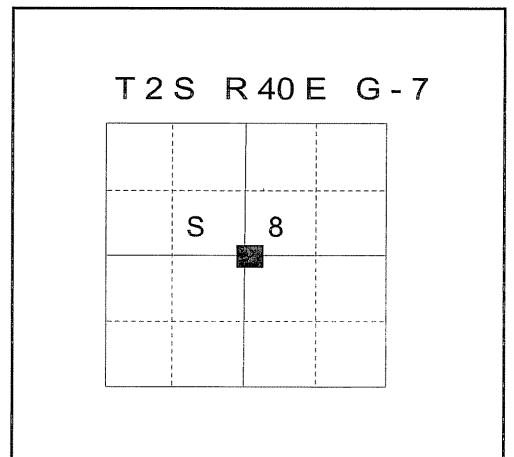

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 2 ½" x 30" aluminum monument with aluminum cap marked as shown, 28 inches in the ground from which:

NEW BEARING TREES:

A 14 inch diameter Douglas Fir bears N 40°E, a distance of 100.90 feet, marked "C1/4 S8 BT"

A 14 inch diameter Western Larch bears S 89°E, a distance of 97.60 feet, marked "C1/4 S8 BT"

A 10 inch diameter Western Larch bears S 11°W, a distance of 21.30 feet, marked "C1/4 S8 BT"

A 9 inch diameter Spruce bears N 15°W, a distance of 43.90 feet, marked "C1/4 S8 BT"


I hereby certify that the corner was monumented on July 28, 2004.

Witness: Greg Blackman, Jr. and Mike Spicer

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 2004

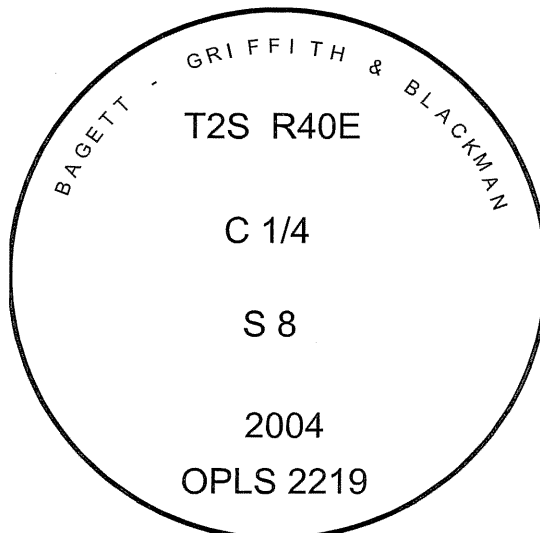

**UNION COUNTY
SURVEYOR**

Date Received 8/4/04

Date Filed 8/4/04

Filed By Greg T. Blackman

File Number 040-2004R

I used a steel tape and magnetic compass in the establishment of new bearing trees. The magnetic declination used was 18° East. The distance to the bearing trees are to a 50d spike driven on the right side of the tree at the root crown. I attached a brass washer marked OPLS 2219 to the BT blaze.