


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner not previously established.

T 2 S R 40 E H-3



DESCRIPTION OF CORNER EVIDENCE FOUND:

None.

SEE SURVEY NUMBER 037-2026

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At position by Survey I set a 5/8"x30" iron pin, 22" in the ground and in a 2 ft. diam. collar of stone, with a 2 1/2" aluminum cap, marked as shown below, from which:


NEW BEARING OBJECTS:

A 5/8"x15" iron pin with 1 1/2" aluminum cap bears North 67°04' East, a distance of 18.09 feet, marked "NE RP".
A 5/8"x15" iron pin with 1 1/2" aluminum cap bears North 31°32' West, a distance of 16.28 feet, marked "NW RP".


Set steel fence post approx. 1 ft. East.

I hereby certify that the corner was monumented on August 28th, 2026

Witness: Kyle Tucker

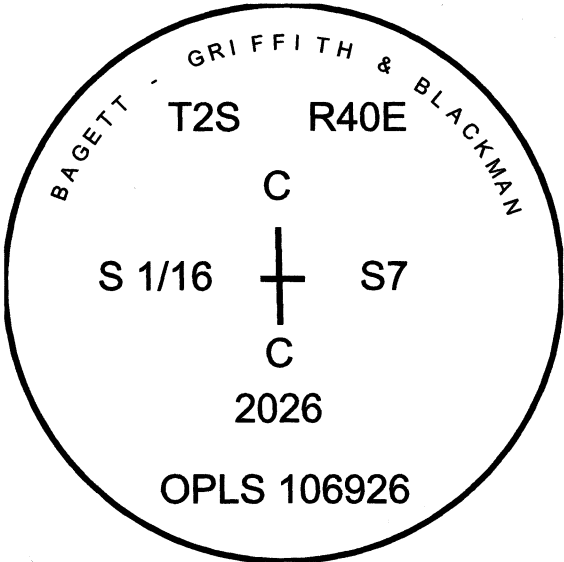

Renewal Date: June 30, 2028

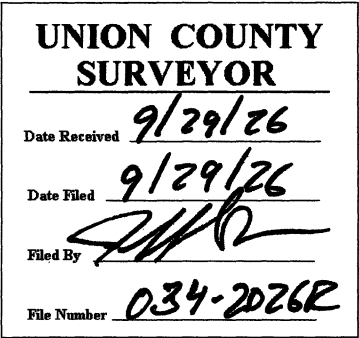

I used a Leica GS 18 with RTK in the establishment of the new bearing objects. Basis of bearing is as per map of survey number 037-2026. Bearings and distances are measured to the center of the aluminum caps.