


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:
Corner not previously established.

T 2 S R 40 E H-4



DESCRIPTION OF CORNER EVIDENCE FOUND:
None.

SEE SURVEY NUMBER 037-2026
DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE
ORIGINAL LOCATION OF THIS CORNER:
At position by Survey I set a 5/8"x30" iron pin 26" in the ground, with a 2 1/2" aluminum cap,
marked as shown below, from which:


NEW BEARING OBJECTS:

A 5/8"x15" iron pin bears South 29°32' East, a
distance of 18.59 feet, with a 1 1/2" aluminum cap
marked "BGB SURVEY MARKER SE RP".
A 5/8"x15" iron pin bears South 41°57' West, a
distance of 20.25 feet, with a 1 1/2" aluminum cap
marked "BGB SURVEY MARKER SW RP".

Set steel fence post approx. 1 ft. West.

I hereby certify that the corner was monumented on
August 28th, 2026

Witness: Kyle Tucker

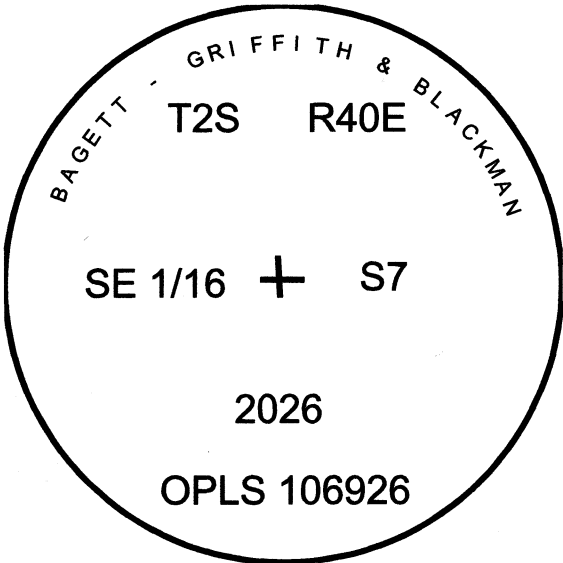

Renewal Date: June 30, 2028

I used a Leica GS 18 with RTK in the establishment
of the new bearing objects. Basis of bearing is as
per map of survey 037-2026. Bearings and distances
are measured to the center of the aluminum caps.

