

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner was originally established under GLO contract number No. 103, dated September 3rd, 1863, executed by David P. Thompson. Surveyor General field notes state:

Set post for quarter section corner in mound of stone.

In 1899 Arthur Curtis notes "commenced on the North side of Sec. corner of Sec. 18 run West" in Old Book Surveys, Page 346

T 2 S R 40 E J-3

	S	18	

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

SEE SURVEY NUMBER 037-2026

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At position by Survey I set a 5/8"x18" iron pin, 8" in the ground to bedrock and in a 3 ft. diam. collar of stone, with 2 1/2" aluminum cap marked as shown below, from which:


NEW BEARING OBJECTS:

A 5/8"x15" iron pin bears North 76°26' East, a distance of 19.15 feet, with a 1 1/2" aluminum cap marked "BGB SURVEY MARKER NE RP".
A 5/8"x15" iron pin bears South 28°59' East, a distance of 27.88 feet, with a 1 1/2" aluminum cap marked "BGB SURVEY MARKER SE RP".
A 5/8"x15" iron pin bears South 66°04' West, a distance of 20.41 feet, with a 1 1/2" aluminum cap marked "BGB SURVEY MARKER SW RP".
A 3x3x3 rock outcrop bears North 61°37' West, a distance of 37.60 feet, marked "X B0".


Set steel fence post approx. 2 ft. West

I hereby certify that the corner was monumented on August 31, 2026

Witness: Kyle Tucker

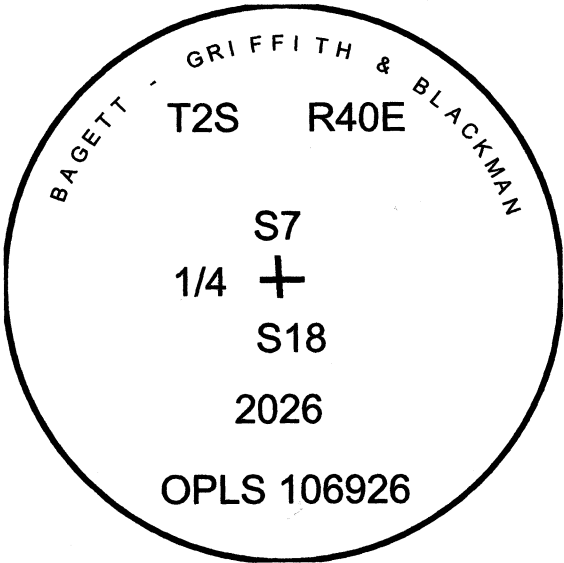

Renewal Date: June 30, 2028

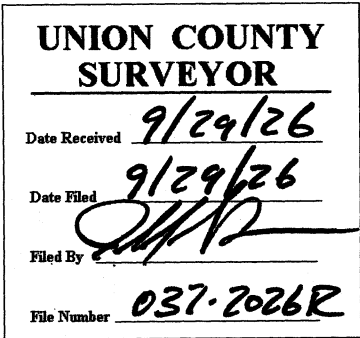

I used a Leica GS 18 with RTK in the establishment of the new bearing objects. Basis of bearing is as per map of survey number 037-2026. Bearings and distances are measured to the center of the aluminum caps or to the center of the chiseled "X".