

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:
Corner not previously established.

T 2 S R 40 E J-4

	S	18

DESCRIPTION OF CORNER EVIDENCE FOUND:
None.

SEE SURVEY NUMBER 037-2026
DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:
At position by Survey I set a 5/8"x30" iron pin 28" in the ground and in a 2 ft. diam. collar of stone, with a 2 1/2" aluminum cap, marked as shown below, from which:

NEW BEARING OBJECTS:


A 1" diam. axle with a 3 1/2" gear on top bears South 31°2' West, a distance of 6.92 feet, marked "SW RP" (fence anchor).
A 5/8"x15" iron pin bears North 48°36' West, a distance of 22.08 feet, with 1 1/2" aluminum cap marked "BGB SURVEY MARKER NW RP".

The fence corner to North/East/South bearing fence lines falls ± 6' South East.

Set steel fence post approx. 0.3 ft. North

I hereby certify that the corner was monumented on August 31st, 2026

Witness: Kyle Tucker

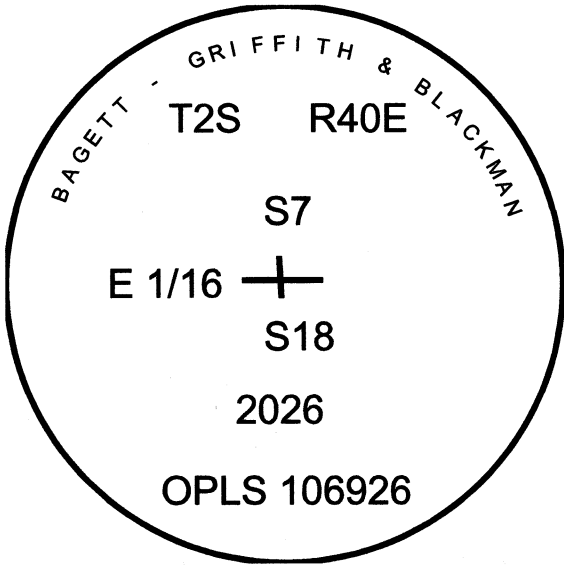

Renewal Date: June 30, 2028

I used a Leica GS 18 with RTK in the establishment of the new bearing objects. Basis of bearing is as per map of survey number 037-2026. Bearings and distances are measured to the center of the aluminum caps and/or the center of the axle.

