

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner was originally established under GLO contract number No. 103, dated September 3rd, 1863, executed by David P. Thompson. Surveyor General field notes state:

Set post for corner to sections 7, 8, 17, & 18 in a mound of stone.

Corner found and replaced same by Henry Meldrum under GLO contract number No. 450, dated June 11th, 1882. Surveyor General field notes state:

A post in mound of stone, post being decayed, replace same with a basalt stone 18x12x6 marked with 4 notches on S and 5 on E edges.

In 1890 J.W. Kimbrell notes using the corner as part of a survey of Sections 5, 6, 7, and 8 in Old Book Survey #116, Page 252.

T 2 S R 40 E J-5

	S	18

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found an 8"x12"x6" broken stone with four notches on one side and five notches on another. A 10"x12"x6" broken stone matches the main break of the notched stone to make an 18"x12"x6" total sized stone in an ancient rock jack with a current pipe fence corner to East/South/West bearing fence lines.

SEE SURVEY NUMBER: 037-2026

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At position of fence corner, I set a 5/8"x30" iron pin, 28" in the ground and in a 3 ft. diam. collar of stone, with a 2 1/2" aluminum cap marked as shown below, from which:

NEW BEARING OBJECTS:


A 5/8"x15" iron pin bears North 35°41' East, a distance of 13.33 feet, with an 1 1/2" aluminum cap marked "BGB SURVEY MARKER NE RP".
A 5/8"x15" iron pin bears South 39°03' East, a distance of 16.17 feet, with an 1 1/2" aluminum cap marked "BGB SURVEY MARKER SE RP".
A 5/8"x15" iron pin bears South 34°22' West, a distance of 25.44 feet, with an 1 1/2" aluminum cap marked "BGB SURVEY MARKER SW RP".
A 5/8"x15" iron pin bears North 43°18' West, a distance of 18.07 feet, with an 1 1/2" aluminum cap marked "BGB SURVEY MARKER NW RP"

Buried stone fragments on North side of monument.

Falls on North side of fence corner.

I hereby certify that the corner was monumented on August 18th, 2026

Witness: Kyle Tucker

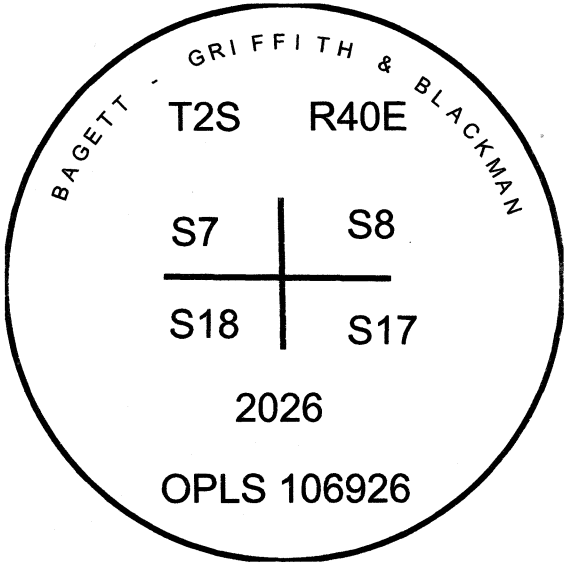

Renewal Date: June 30, 2028

I used a Leica GS 18 with RTK in the establishment of the new bearing objects. Basis of bearing is as per map of survey number 037-2026. Bearings and distances are measured to the center of the aluminum caps.

