

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:


Corner not previously established.

No record of monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Map of survey number 021-2004

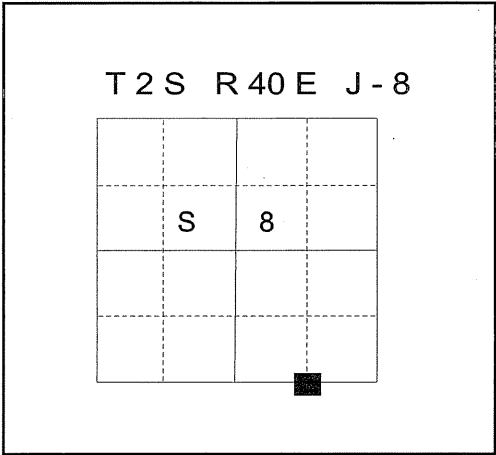

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

A 21 inch diameter Ponderosa Pine occupies the position of the 1/16th corner. I marked the tree "E 1/16 S8" on the North face and "E 1/16 S17" on the South face, from which:

NEW BEARING TREES:

An 18 inch diameter Ponderosa Pine bears N 1°E, a distance of 60.50 feet, marked "E 1/16 S8 BT"


A 21 inch diameter Ponderosa Pine bears S 1°E, a distance of 39.10 feet, marked "E 1/16 S17 BT"

Also set a 5/8"x30" iron pin with plastic cap marked "BGB SURVEY MARKER" North 89°44'09" West, a distance of 8.00 feet from the true corner position as a part of Survey Number 021-2004)

I hereby certify that the corner was monumented on August 2, 2004.

Witness: Greg Blackman, Jr. and Mike Spicer

REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 2004

**UNION COUNTY
SURVEYOR**

Date Received 8/4/04

Date Filed 8/4/04

Filed By Greg T. Blackman

File Number 039-2004R

I used a steel tape and magnetic compass in the establishment of new bearing trees. The magnetic declination used was 18° East. The distance to the bearing trees are to a 50d spike driven on the right side of the tree at the root crown. I attached a brass washer marked OPLS 2219 to the BT blaze.