


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. J-17

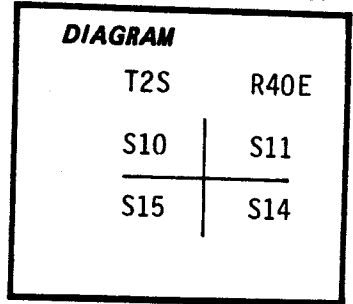

History of original corner establishment:
 In July, 1882, under GLO Contract No. 450, Henry Meldrum set post 4 ft. long, 4 inches square, 24 inches in ground for cor. to secs. 10, 11, 14 and 15 marked T2S, S10 on N.W., R40E. S15 on S.W., S14 on S.E. and R40E S11 on N.E. with 4 notches on S. and 2 on E. edges from which:

- A Tamarack 26 in. diam. bears N57° E, (25.70 ft.) 45 lks. dist. marked S11 BT
- A Tamarack 18 in. dia. bears N53°W 78 lks (51.48 ft.) dist. marked T2S S10 BT
- A Tamarack 24 in. dia. bears S59°W, (28.38 ft.) 43 lks. dist. marked R40E., S15 BT
- A Fir 32 in. dia. bears S45°E (14.52 ft.) 22 lks. dist. marked S14 BT

Description of corner evidence found:

At corner location could find no evidence of original post. Found cut down Tamarack 23" dia. with rotted open upper blaze with remains of scribing visible "R4 15" for SW B.T. at record bearing and dist. from center of stump set 40d spike. Found rotted remains of stump for possible N.E. BT at record bearing and distance from 40d and spike. Could find no evidence of other BT's.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of 40d spike set 2 1/2'x30" galvanized pipe with brass cap attached stamped:

Set pipe 24" in ground with mound of dirt and stone to cap from which:

- A Douglas Fir 14" dia. bears N50° E., 112.2 ft. scribed T2S. R40 E. S11 BT.
- A White Fir 13" dia. bears S10°E, 18.3 ft. scribed T2S R40E S14 BT
- A Douglas Fir 9" dia. bears S29° W, 25.9 ft. scribed T2S R40E S15 BT
- A Douglas Fir 18" dia. bears N17° W, 39.7 ft. scribed T2S R40E S10 BT


T2S R40E
 S10 | S11
 S15 | S14
 PLS 1099
 1981

Attached brass washer stamped LS 1099 to foot blaze of new BT's. Attached 54-3 and 54-4 signs to all BT's and painted blazes and 6" band around all BT's red. Attached 54-4 sign to metal post 5' east of cor.

Magnetic Declination = 18°30'E

I hereby certify the above corner monument was reestablished as herein described on 12/9/81.

Witness: R. Orton

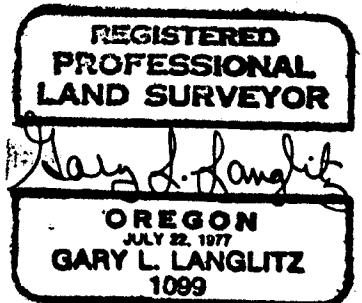

Office of Union County Surveyor County of Union
 State of OREGON I hereby certify that the within instrument was filed in this office
 for record on the 15 day of DECEMBER 1981
HOWARD L. PERRY by G. LANGLITZ
 (COUNTY OFFICIAL) (DEPUTY)

| | |
|-------------------------------|----------------------------|
| UNION COUNTY SURVEYOR | |
| Date Received <u>12-15-81</u> | Date Filed <u>12-15-81</u> |
| By _____ | File No. <u>339-84R</u> |