

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner not previously established.

T 2 S R 40 E K-2

	■	S	18

DESCRIPTION OF CORNER EVIDENCE FOUND:

None.

SEE SURVEY NUMBER 037-2026

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At position by Survey I set a 5/8"x30" iron pin, 31" in the ground, with a 2 1/2" aluminum cap marked as shown below, from which:


NEW BEARING OBJECTS:

A 5/8"x15" iron pin bears South 89°49' West, a distance of 180 feet, with a yellow plastic cap marked "BGB Survey Marker".

A 5/8"x15" iron pin bears South 0°07' West, a distance of 21.16 feet, with a yellow plastic cap marked "BGB Survey Marker".

I hereby certify that the corner was monumented on August 31st, 2026

Witness: Kyle Tucker

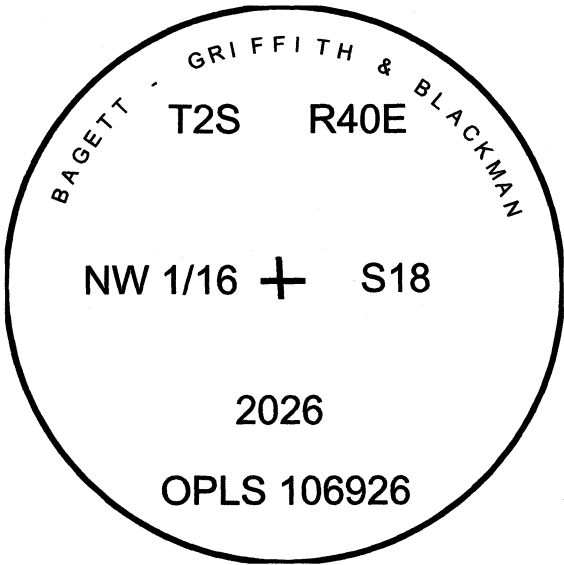

Renewal Date: June 30, 2028

I used a Leica GS 18 with RTK in the establishment of the new bearing objects. Basis of bearing is as per map of survey number 037-2026. Bearings and distances are measured to the center of the aluminum caps.

