


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:
None previously established.

T 2 S R 40 E K-3



DESCRIPTION OF CORNER EVIDENCE FOUND:
None.


SEE SURVEY NUMBER 037-2026
DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:
At position by Survey I set a 5/8"x30" iron pin, 31" in the ground, with a 2 1/2" aluminum cap, marked as shown below, from which:

NEW BEARING OBJECTS:
A 5/8"x30" iron pin bears North 38°26' East, a distance of 10.24 feet, with 1 1/2" aluminum cap marked "BGB SURVEY MARKER NE RP".
A 5/8"x30" iron pin bears South 22°01' East, a distance of 15.35 feet, with 1 1/2" aluminum cap marked "BGB SURVEY MARKER SE RP".


Corner falls ± 11 feet North West of fence corner to North/East/South bearing fence lines.

I hereby certify that the corner was monumented on August 31st, 2026

Witness: Kyle Tucker

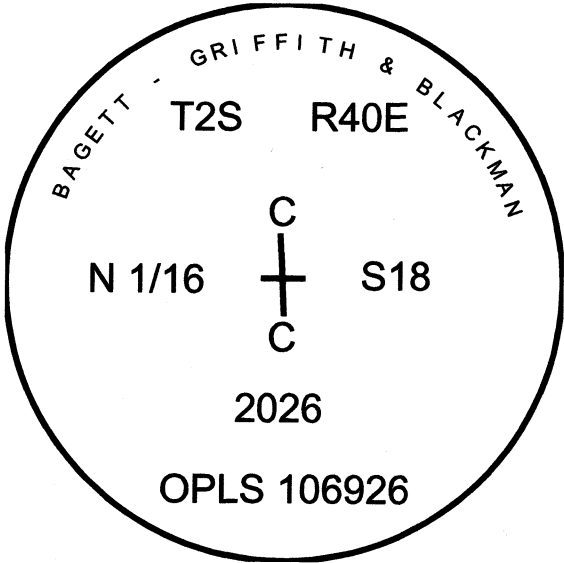

REGISTERED
PROFESSIONAL
LAND SURVEYOR


OREGON
May 12, 2026
KYLE A. TUCKER
106926


Renewal Date: June 30, 2028

I used a Leica GS 18 with RTK in the establishment of the new bearing objects. Basis of bearing is as per map of survey number 037-2026. Bearings and distances are measured to the center of the aluminum caps.

UNION COUNTY
SURVEYOR

Date Received 9/29/26

Date Filed 9/29/26

Filed By 

File Number 041-2026R