

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner was originally established under GLO contract number No. 103, dated September 3rd, 1863, executed by David P. Thompson. Surveyor General field notes state:

Set post for quarter section corner in mound of stone.

In 1889, J. W. Kimbrell notes using the quarter corner as part of Old Book Surveys, Page 146.

T 2 S R 40 E L-5



DESCRIPTION OF CORNER EVIDENCE FOUND:

None.
Fence extends North from the North side of a recently built drive way.
Remnants of East/West fence line exist on the West side of Lower Cove Road.


SEE SURVEY NUMBER 037-2026

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At position by Survey I set a 5/8"x30" iron pin, 31" in the ground, with 2 1/2" aluminum cap, marked as shown below, from which:

NEW BEARING OBJECTS:

A 5/8"x30" iron pin bears North 22°25' East, a distance of 37.57 feet, with 1 1/2" aluminum cap marked "BGB SURVEY MARKER NE RP".
A 5/8"x30" iron pin bears South 19°43' East, a distance of 60.00 feet, with 1 1/2" aluminum cap marked "BGB SURVEY MARKER SE RP".
A 5/8"x30" iron pin bears South 40°41' West, a distance of 44.23 feet, with 1 1/2" aluminum cap marked "BGB SURVEY MARKER SW RP".
A 5/8"x30" iron pin bears North 71°13' West, a distance of 65.24 feet, with 1 1/2" aluminum cap marked "BGB SURVEY MARKER NW RP".

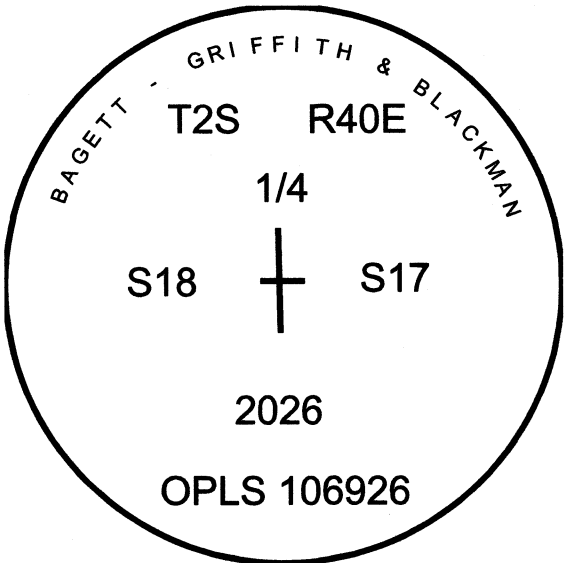

I hereby certify that the corner was monumented on August 28th, 2026

Witness: Kyle Tucker

REGISTERED
PROFESSIONAL
LAND SURVEYOR
[Signature]
OREGON
May 12, 2026
KYLE A. TUCKER
106926

Renewal Date: June 30, 2028

I used a Leica GS 18 with RTK in the establishment of the new bearing objects. Basis of bearing is as per map of survey number 037-2026. Bearings and distances are measured to the center of the aluminum caps.

UNION COUNTY
SURVEYOR
Date Received 9/29/26
Date Filed 9/29/26
Filed By *[Signature]*
File Number 042-202612