

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:


Corner was originally established under GLO contract number No. 103, dated September 3rd, 1863, executed by David P. Thompson. Surveyor General field notes state:

Set post for corner to sections 17, 18, 19, & 20 in mound of Earth with charred stake, pits, trench, as per instructions.

In 1889, J. W. Kimbrell notes using the corner as part of Old Book Surveys, Page 144.

In 1899, Arthur Curtis notes, "I commenced at the South East Corner of Section 18 and run West" in Old Book Surveys, Page 346.

T 2 S R 40 E N-5



DESCRIPTION OF CORNER EVIDENCE FOUND:

None.

The area has been historically cultivated.


SEE SURVEY NUMBER 037-2026

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At double proportion position by survey, I set a 2 1/2"x30" aluminum pipe, 44" in the ground, with a 3" aluminum cap, marked as shown below, from which:

NEW BEARING OBJECTS:


- A 5/8"x15' iron pin bears North 41°17' East, a distance of 24.35 feet, with a 1 1/2" aluminum cap marked "BGB SURVEY MARKER NE RP".
- A 5/8"x15' iron pin bears South 20°16' East, a distance of 17.48 feet, with a 1 1/2" aluminum cap marked "BGB SURVEY MARKER SE RP".
- A 5/8"x15' iron pin bears South 40°06 West, a distance of 21.79 feet, with a 1 1/2" aluminum cap marked "BGB SURVEY MARKER SW RP".
- A 5/8"x15' iron pin bears North 39°11 West, a distance of 23.20 feet, with a 1 1/2" aluminum cap marked "BGB SURVEY MARKER NW RP".

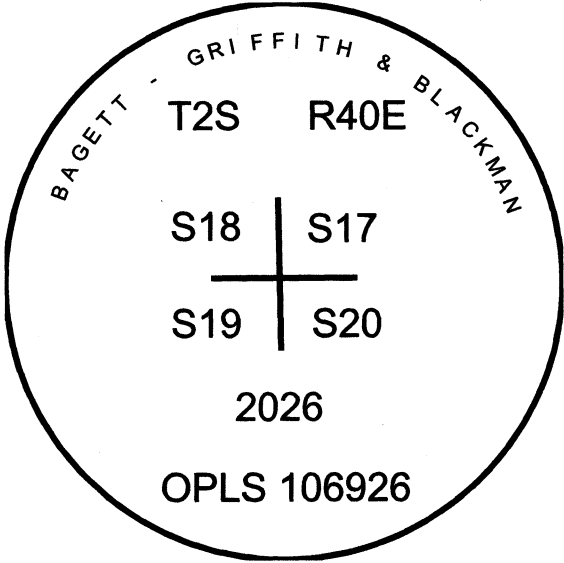

I hereby certify that the corner was monumented on August 19th, 2026

Witness: Kyle Tucker, Emily McClelland

REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
May 12, 2026
KYLE A. TUCKER
106926

Renewal Date: June 30, 2028

UNION COUNTY
SURVEYOR

Date Received 9/29/26

Date Filed 9/29/26

Filed By 

File Number 046-2026R

I used a Leica GS 18 with RTK in the establishment of the new bearing objects. Basis of bearing is as per map of survey number 037-2026. Bearings and distances are measured to the center of the aluminum caps.