

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner was originally established under GLO contract number No. 102, dated July 20th, 1863, executed by Timothy W. Davenport. Surveyor General field notes state:

Set quarter section post on bank of river, from which:

Willow 6 in diam bears N45°W, 7½ lks dist.
Willow 6 in diam bears S45°E, 7½ lks dist.

DESCRIPTION OF CORNER EVIDENCE FOUND:

None.

SEE SURVEY NUMBER 037-2026



DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At proportioned position by Survey I set a 2 ½"x30" aluminum pipe 30" in the ground, with a 3" aluminum cap, marked as shown below, from which:

NEW BEARING OBJECTS:

A 5/8"x30" iron pin bears North 86°13' East, a distance of 46.60 feet, with a 1 ½" aluminum cap marked "BGB SURVEY MARKER NE RP".
A 5/8"x30" iron pin bears South 42°19' East, a distance of 40.00 feet, with a 1 ½" aluminum cap marked "BGB SURVEY MARKER SE RP".
A 5/8"x30" iron pin bears South 57°43' West, a distance of 26.47 feet, with a 1 ½" aluminum cap marked "BGB SURVEY MARKER SW RP".
A 5/8"x30" iron pin bears North 43°05' West, a distance of 20.46 feet, with a 1 ½" aluminum cap marked "BGB SURVEY MARKER NW RP".

T 2 S R 40 E P-1

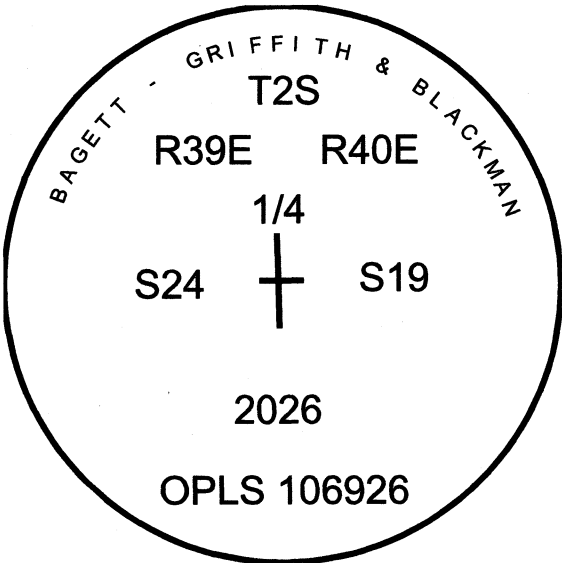

Corner falls ± 10 feet West of fence remnants on the South bank of the Grande Ronde River.

Set steel fence post approx. 0.5 ft. North.

I hereby certify that the corner was monumented on August 28th, 2026

Witness: Kyle Tucker



Renewal Date: June 30, 2028

I used a Leica GS 18 with RTK in the establishment of the new bearing objects. Basis of bearing is as per map of survey number 037-2026. Bearings and distances are measured to the center of the aluminum caps.

