


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. C-05

History of original corner establishment:

Original corner established in 1898 by Alonzo Gesner under contract #683
He set a stone 16"x12"x4", 10" in ground
From which:
An 8" W. Fir bears S48°E, 163 lks.
An 8" W. Fir bears N63°W, 83 lks.

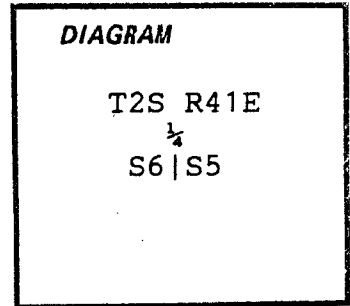

Description of corner evidence found:

Found Stone of the recorded dimensions in a mound of stones. Faint marks visible.

Original bearing trees found:

A 15" White fir bears N60½°W, 83 lks., blaze healed.
A 13½" White Fir bears S48°E, 163 lks., open blaze
¼S5BT visible.

Description of monument and accessories I established to perpetuate the original location of this corner:

Cap is stamped: T2SR41E

From original evidence:

Set a 2½"X30" aluminum capped aluminum pipe rising 14" in Mound of stones.

New BT's:

A 7½" Spruce bears N47½°W, 3.7 ft., blazed and scribed: ¼S6BT.

A 7½" Spruce bears S47½°E, 35.1 ft. blazed&scribed ¼S5BT

Set steel fence post 3 ft. north of corner.

RLS1848
1986

Painted blazes and attached signs as required in Specifications for Cadastral Surveys, USFS Region 6, March, 1982. A ¾" brass disk stamped "LS1848 nailed to lower end of blazes.

To find corner go SW from the intersection of USFS Rds. 6200270 & 6200240 to the east end of the large clearing. Go to the west end of the clearing. The corner is N70°W, 350 ft. Compass Declination: 19½°E
Witness: Jeremy Sutton

REGISTERED PROFESSIONAL LAND SURVEYOR

Jeremy Sutton
OREGON
JULY 13, 1979
B. A. SUTTON
1848

UNION COUNTY SURVEYOR
Date Received 11-21-86
Date Filed 11-26-86
By G. LANGLITZ, DEPUTY
File No. 281-86 R

I hereby certify that the above described corner monument and/or accessories was perpetuated as hereon described on Sept. 15, 1986.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)