

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


J-17

History of original corner establishment:

1899, John W. Kimbrell, U.S. Deputy Surveyor, working under G.L.O. contract No. 700, established this corner by setting a fir post 3' long by 4" square and marking 4 Bearing Trees. THIS WORK IS REJECTED BY THE G.L.O.

1901, John W. Kimbrell obliterates his 1899 corner and established the corner by setting a fir post 3' long by 4" square and marking 4 bearing trees. The 1899 obliterated corner bears N. 20°30' E., 214 links. THIS WORK IS REJECTED BY THE G.L.O.

1903, John W. Kimbrell obliterates his 1901 corner and established the corner by setting a fir post 3' long by 4" square, 24 inches in the ground, marked "T3N, S11" on NE, "R38E S14" on SE, "S15" on SW and "S10" on NW faces, from which;
3" fir bears N. 10° E., 8 links, marked "T3N R38E S11 BT".
12" pine bears S. 61° E., 3 links, marked "T3N R38E S14 BT".
5" fir bears S. 36° W., 7 links, marked "T3N R38E S15 BT".
3" fir bears N. 76° W., 4 links, marked "T3N R38E S10 BT".
1901 obliterated corner bears North, 453 links.

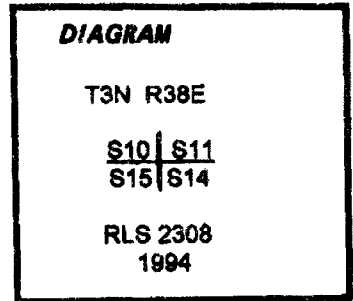

Description of corner evidence found:

I found the original southeast and southwest bearing trees.

15" Lodgepole pine bears S. 61° E., 2.0 feet, with healed double blaze.
9" White fir snag bears S. 36° W., 4.6 feet. I chopped open healed blaze to reveal scribing.

In addition I found remnants of the 1899 (lodgepole pine snag and downed decayed spruce bearing trees) and 1901 (3 live bearing trees) obliterated corners.

Description of monument and accessories I established to perpetuate the original location of this corner:

At intersection of record bearing and distances from the SE and SW bearing trees I set a 2 1/2" diameter by 30" aluminum pipe, with a 3 1/4" diameter aluminum cap, 25" in the ground, from which;

20" White fir bears N. 19° E., 25.2 feet, scribed "T3N R38E S11" "BT" on double blaze with a 3/4" diameter brass washer stamped "RLS 2308" nailed next to the "BT" scribing on the lower blaze.
9" White fir bears S. 40° W., 27.6 feet, scribed "T3N R38E S15" "BT" on double blaze with a 3/4" diameter brass washer stamped "RLS 2308" nailed next to the "BT" scribing on the lower blaze.
17" Western larch bears N. 20 3/4° W., 45.9 feet, scribed "T3N R38E S10" "BT" on double blaze with a 3/4" diameter brass washer stamped "RLS 2308" nailed next to the "BT" scribing on the lower blaze.

DATUM: NAD83(1991)
STATE PLANE COORDINATES: OREGON NORTH ZONE (meters)
Latitude: 45°44'47.08772" North
Longitude: 118°02'07.95652" West

Northing: 234034.248 meters Easting: 2691734.955 meters

Date: July 28, 1994

Witnessed by: Rachelle Fletcher

Magnetic declination: 20° East

REGISTERED
PROFESSIONAL
LAND SURVEYOR

David A. Schlaich

OREGON
JULY 18, 1987
DAVID A. SCHLAICH
2308

Renews 12-13-94

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

JUNIOR COUNTY
SUBDIVISION

Date Received 12/14/94
Date Filed 12/31/94
By Hugo T. Black
File No 170-1994R