

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner was established by Rufus S. Moore in 1882 under GLO Contract 437 Dated June 3, 1882. Surveyor General Record States:

Set a post for $\frac{1}{4}$ corner from which:

- A Pine 4" Diameter Bears N 28° E 47 lks. (31.02 ft.)
- A Cotton Wood 4" Diameter Bears S 71° E 60 lks. (39.60 ft.)

A-15

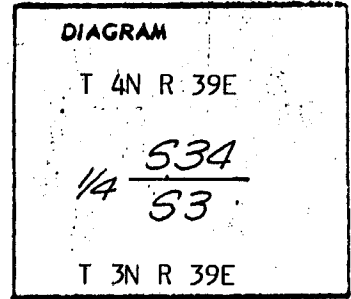

Description of corner evidence found: None

Description of monument and accessories established to perpetuate the


original location of this corner At a position which I proportioned in on the True Line between the corner to Sections 33, 34, 3 and 4 and 34, 35, 2 and 3 T 3N and T 4N R 39E WM.

I set a 2 $\frac{1}{2}$ "x30" Aluminum Pipe with 2 $\frac{1}{2}$ " Aluminum Cap stamped as shown at computed location. Found no evidence of previous corner. Scribed two trees for the corner:

- A Tamarack 14" Diameter Bears N 62°30'E 10.90' Dist.
- A Pine 20" Diameter Bears S 03°E 56.00' Dist.

Trees have red painted blazes and 6" stripe with a Brass Washer 933 nailed to B.T. Blaze. Signs 54-4 and 54-9. I used a steel tape and magnetic compass with 20° East variation and measured a horizontal distance to the center of the B.T.'s.

Witness W. Keith Sands - J.R. Sands - Rod Punches Set 8-3-82

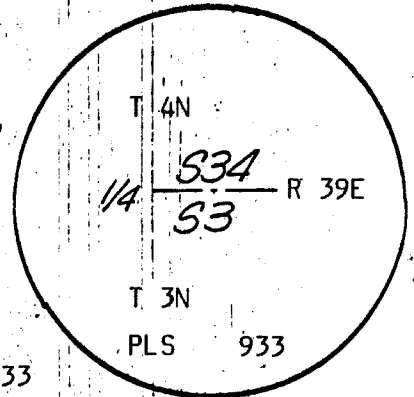

REGISTERED
PROFESSIONAL
LAND SURVEYOR

David H. Krumbein

OREGON
JULY 17, 1970
DAVID H. KRUMBEIN
933

Office of Surveyor County of Union
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 13 day of AUGUST, 1982.
County Surveyor by W. Keith Sands
(COUNTY OFFICIAL) (SURVEYOR)

COUNTY SURVEYOR

Date Received: _____

Date Filed: _____

By: _____

GPO 796-333

File No. 116-83R