

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

C-13


History of original corner establishment:

Corner was established by Frank Campbell in 1884 under GLO contract No. 498, dated May 10, 1884.

Set a 4" square post for $\frac{1}{4}$ corner from which:

A Tamarack 20" Diameter Bears N.84°E a Dist. of 105 lks. (69.30 ft.)

A Fir 20" Diameter Bears N 68°W a Dist. of 20 lks. (13.20 ft.)



Description of corner evidence found:

None

At a position which I proportioned in on the true line between the corner to sections 33, 34, 4 & 3 and 4, 3, 9 & 10 T 3N R 39E, WM

Description of monument and accessories I established to perpetuate the original location of this corner

Set 2 1/2"x30" Aluminum Pipe with 2 1/2" Aluminum Cap stamped as shown at computed location. Found no evidence of previous corner. Scribbed two trees,

A Tamarack 11" Diameter Bears S 05°W 39.05 Dist. Scribbed $\frac{1}{4}$ S 4 B.T.


A Tamarack 11" Diameter Bears S 53°E 14.60 Dist. Scribbed $\frac{1}{4}$ S 3 B.T.

Set steel post 5' North with signs #54-4 & 54-9

Trees have red painted blazes and 6" stripe. Signs #54-3 & 54-4 and Brass washer 933 on B.T. Blaze.

I used a steel tape and magnetic compass with 20° East variation and measured a horizontal distance to the center of the B.T.'s

Witness W. Keith Sands Witness J.R. Sands Set July 27, 1982

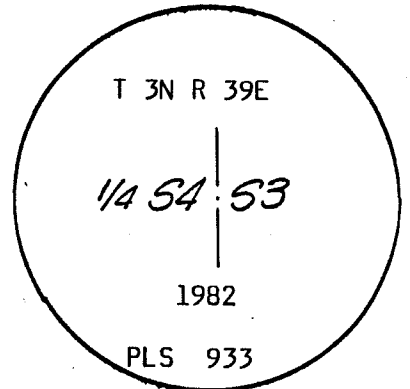

REGISTERED PROFESSIONAL LAND SURVEYOR

David H. Krumbein
OREGON
JULY 17, 1970
DAVID H. KRUMBEIN
933

Office of SURVEYOR County of Union
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 13 day of AUGUST, 1982.
COUNTY SURVEYOR by Gay Slaughter
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 125-83R