


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Not previously set

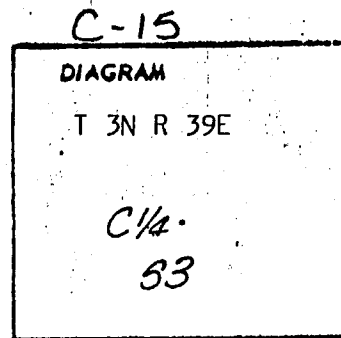

Description of corner evidence found:

None

Description of monument and accessories established to perpetuate the

original location of this corner Corner set at intersection point between the four  $\frac{1}{4}$  corners. Set Aluminum Cap  $2\frac{1}{2}$ " on  $2\frac{1}{2}$ "x30" Aluminum Pipe 26" in ground.


Scribed two trees:

A Tamarack 17" Diameter Bears N  $11^{\circ}$ E a distance of 20.60 ft.

A Tamarack 14" Diameter Bears N  $84^{\circ}$ E a distance of 45.20 ft.

Both trees scribed C  $\frac{1}{4}$  S3 B.T. Blazes painted red and 6" red stripe. Brass washer PLS 933 nailed to B.T. Blazes. Signs 54-3 & 54-4 on both trees. Set steel post 5 ft. North with signs 54-4 & 54-9 small drainage runs by 2.5 ft. North of corner. I used a steel tape and magnetic compass with  $20^{\circ}$  East variation and measured a horizontal distance to the center of the B.T.'s

Set by W. Keith Sands - Witness J.R. Sands 7-28-82

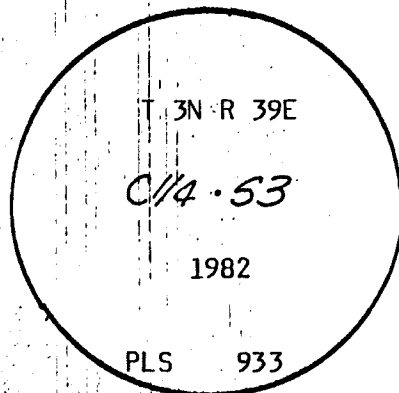

REGISTERED PROFESSIONAL LAND SURVEYOR

*David H. Krumbain*  
OREGON  
JULY 17, 1970  
DAVID H. KRUMBEIN  
933

Office of..... Surveyor..... County of..... Union  
State of..... Oregon....., I hereby certify that the within instrument was filed in this office  
for record on the 15 day of August, 1982.  
County Surveyor..... by *Gay Jambert* (DEPUTY)

UNION COUNTY SURVEYOR

Received \_\_\_\_\_

Dated \_\_\_\_\_

By \_\_\_\_\_

File No. 126-83R