


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

C-18

History of original corner establishment:

Corner not set in original survey

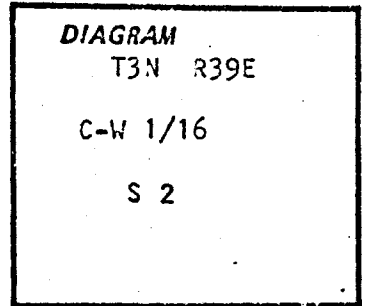

No record of subsequent monumentation found in county records.

Description of corner evidence found:

See map of survey No. 4-81


Description of monument and accessories I established to perpetuate the original location of this corner:

At corner point I set 1 1/2" x 30" iron pipe with brass cap marked as shown 26" in ground from which:

New BTs

A 12" white fir bears S 25° E, 32.1 ft marked CW 1/16 S2 BT

A 10" white fir bears S 45° W, 25.2 ft marked X BT

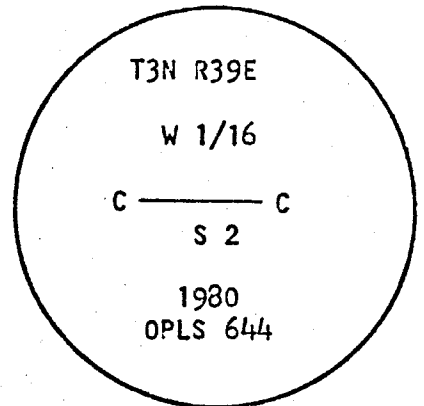

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 17° East declination. Distance measured to center of tree.

REGISTERED PROFESSIONAL LAND SURVEYOR

Duane I. Griffith
OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

UNION COUNTY SURVEYOR

Date Received _____
Date Filed _____

By _____
File No. 128-83R

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by.....
(COUNTY OFFICIAL) (DEPUTY)