


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Not previously set

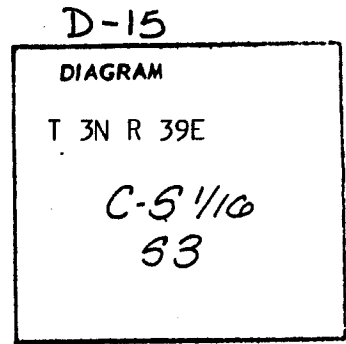

Description of corner evidence found:

None

Set by proportioned method

Description of monument and accessories established to perpetuate the


original location of this corner Set 2 1/2"x30" Aluminum Pipe with 2 1/2" Aluminum Cap stamped as shown, 26" in ground scribed two bearing trees (CS 1/16 S 3 B.T.)

A Tamarack 10" Diameter bears S 85°W 22.40 Distance.

A Fir 9" Diameter bears N 32° W 27.90 distance.

Set steel post 5' East of corner with signs #54-4 & 54-9.

B.T.'s have red painted blazes and 6" stripe signs 54-3 & 54-4 and brass washer 933 on B.T. Blaze.

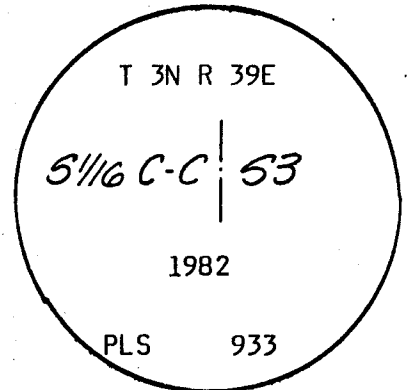

I used a steel tape and magnetic compass with 20° variation and measured a horizontal distance to the center of the B.T.'s 7-27-82

Witness By W. Keith Sands      Witness J.R. Sands

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*David H. Krumbein*

OREGON  
JULY 17, 1970  
DAVID H. KRUMBEIN  
933

Office of ..... Surveyor ..... County of ..... Union .....  
 State of ..... Oregon .....  
 for record on the 13 day of August, 1982  
 COUNTY SURVEYOR ..... by *Larry Langley* (DEPUTY)  
 (COUNTY OFFICIAL)

UNION COUNTY  
SURVEYOR

Date Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 130-832