


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

D-18

History of original corner establishment:

Corner not set in original survey

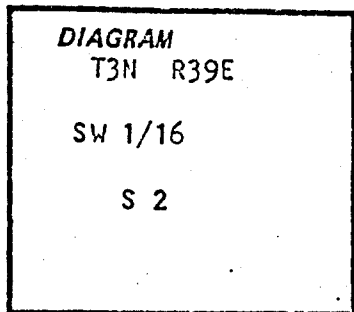

No record of subsequent monumentation found in county records.
Description of corner evidence found:

See map of survey No. 4-81


Description of monument and accessories I established to perpetuate the original location of this corner:

At corner point I set 1 1/2" x 30" iron pipe with brass cap marked as shown 26" in ground, from which:

New BTs

A 10" red fir bears N 27° E, 12.8 ft,
marked SW 1/16 S2 BT

A 14" red fir bears S 48° E, 38.6 ft,
marked X BT

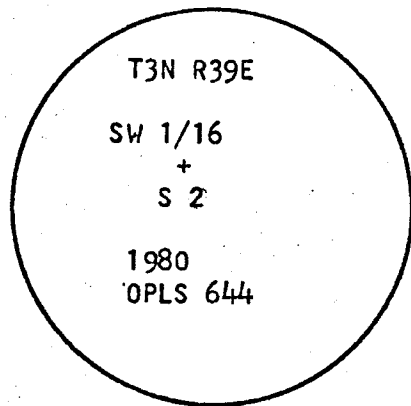

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 17° East declination. Distance measured to center of tree.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY
SURVEYOR

Date Received _____

Date Filed _____

By _____

File N. 131-88R-276