


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

E-11

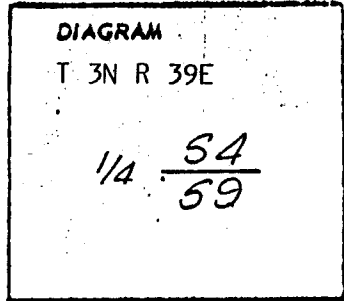

History of original corner establishment:

Corner was established by Frank W. Campbell in 1884 under GLO Contract No. 498, dated May 10, 1884: Surveyor General Record States - Set post for $\frac{1}{4}$ corner 3 ft. long 3 in. square 24 ins. into ground from which:

- A Fir 18" Diameter bears N 22°E, 29 lks. (19.14 ft.)
- A Fir 18" Diameter bears S 47°E, 11 lks. (7.26 ft.)

Description of corner evidence found:

No bearings trees.

Found charred remains of original post at computed distance and bearing.

Description of monument and accessories I established to perpetuate the

original location of this corner At a position which I proportioned in on the true line between the corner to sections 4, 5, 8, 9 and 10 T 3N R 39E WM, I set 2½"x30" Aluminum Pipe with 2½" Aluminum Cap stamped as shown.

Scribed two bearing trees for corner:

A Tamarack 10" Diameter bears S 67°E 45.40" Dist.
Scribed $\frac{1}{4}$ S9 B.T.


A Tamarack 8" Diameter bears N 15°E 23.30' Dist.
Scribed $\frac{1}{4}$ S4 B.T.

Set steel posts 5' East and 5' West with signs #54-4, 54-9 & 54-2.

Trees have red painted blazes and 6" stripe with brass washer 933 on BT blaze. Signs #54-3 & 54-4.

I used a steel tape and magnetic compass with 20° East variation and measured a horizontal distance to the center of the B.T.'s.

Witness J.R. Sands - W. Keith Sands Set July 28, 1982

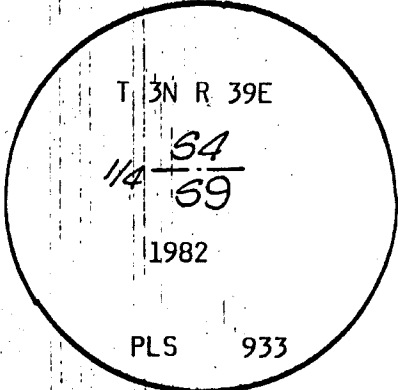

REGISTERED
PROFESSIONAL
LAND SURVEYOR

David H. Krumbain
OREGON
JULY 17, 1970
DAVID H. KRUMBEIN
933

Surveyor County of Union
State of Oregon I hereby certify that the within instrument was filed in the UNION COUNTY
for record on the 13 day of AUGUST, 1982
COUNTY SURVEYOR by *Gary D. Smith*
(COUNTY OFFICIAL) DEPUTY

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 133-83R