


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

E-16

History of original corner establishment:

Corner not set in original survey

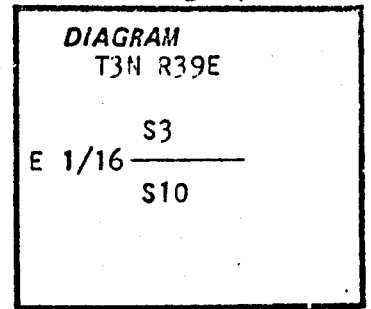

No record of subsequent monumentation found in county records.

Description of corner evidence found:

See map of survey No. 4-81


Description of monument and accessories established to perpetuate the original location of this corner:

At proportionate distance I set 2 1/2" x 30" iron pipe with brass cap marked as shown 26" in ground, from which:

New BTs

A 12" white fir bears S 28° W, 15.4 ft, marked E 1/16 S10 BT

A 12" white fir bears N 63° W, 31.4 ft, marked E 1/16 S3 BT

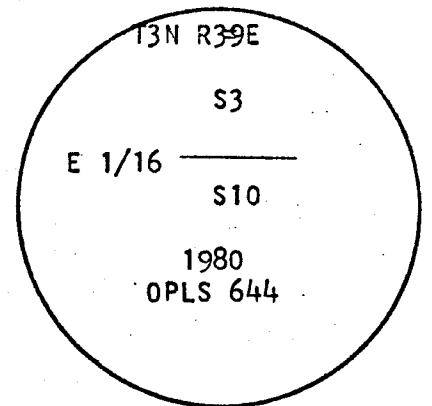

REGISTERED PROFESSIONAL LAND SURVEYOR

*Duane I. Griffith*  
OREGON  
JULY 10, 1964  
DUANE I. GRIFFITH  
644

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 17° East declination. Distance measured to center of tree.

UNION COUNTY SURVEYOR  
Date Received \_\_\_\_\_  
Date Filed \_\_\_\_\_  
By \_\_\_\_\_  
File No. 137-83R

Office of..... County of.....  
State of..... I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)