


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

E-18

History of original corner establishment:

Corner not set in original survey

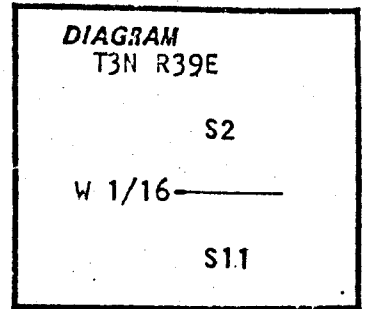

No record of subsequent monumentation found in county records.

Description of corner evidence found:

See map of survey No. 4-81


Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set 2 1/2" x 30" iron pipe with brass cap marked as shown 27" in ground, from which:

New BTs

A 16" white fir bears N 67° E, 18.7 ft, marked W 1/16 S2 BT

A 6" tamarack bears S 67° W, 9.3 ft, marked X BT

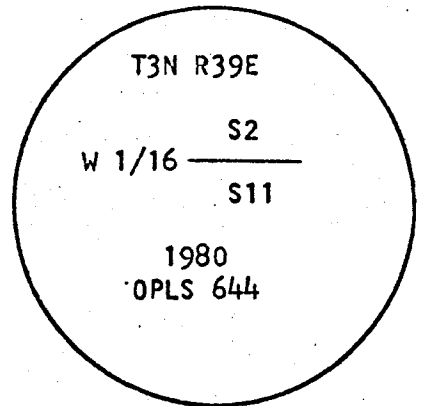

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Handwritten signature of Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 17° East declination. Distance measured to center of tree.

UNION COUNTY
SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 140-83R

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)