


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

H-17

History of original corner establishment:

Corner not set in original survey

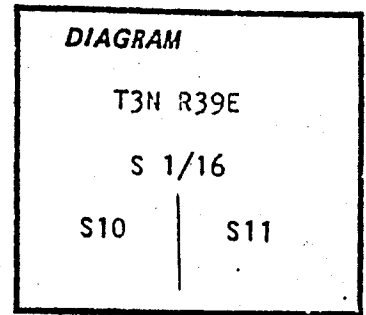

No record of subsequent monumentation found in County Records.

Description of corner evidence found:

See map of survey No. 4-81

Description of monument and accessories I established to perpetuate the original location of this corner:


At proportionate distance I set 1 1/2" x 30" iron pipe with brass cap marked as shown 24" in ground, from which:

New BTs

A 12" p pine bears S11° E, 8.2 ft, marked S 1/16 S11 BT

A 16" p pine bears S 69° W, 18.2 ft, marked S 1/16 S10 BT

Raised mound of stone.

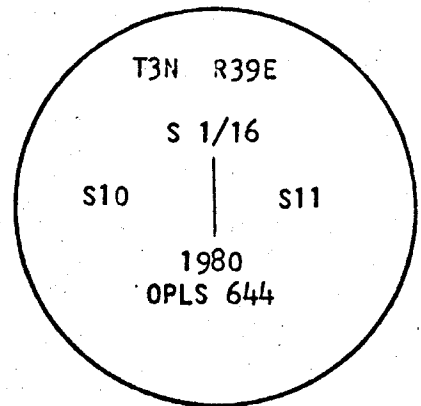

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 17° East declination. distance measured to center of tree.

REGISTERED PROFESSIONAL LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 148-83R

H O P O - 7 9 8 - 2 7 6

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)